

# Concord

## OPTIX LINEAR SURFACE 1200 D/I 4000K ALU EM 2023813



### Features

- OPTIX LINEAR SURFACE 1200 D/I 4000K ALU EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Direct / Indirect lighting with 80% downlight and 20% uplight ratio for ceiling suspended mounting. Size: 1160x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. Constant current driver. 3hr maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 4500lm. Power consumption 34W. Luminaire efficacy 132lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

### Product Overview

Product name	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	85


Concord  
by SYLVANIA

# Concord

## OPTIX LINEAR SURFACE 1200 D/I 4000K ALU EM 2023813

<b>Total power consumption (W)</b>	34
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5025768238132
<b>Warranty</b>	5 years

### Photometry

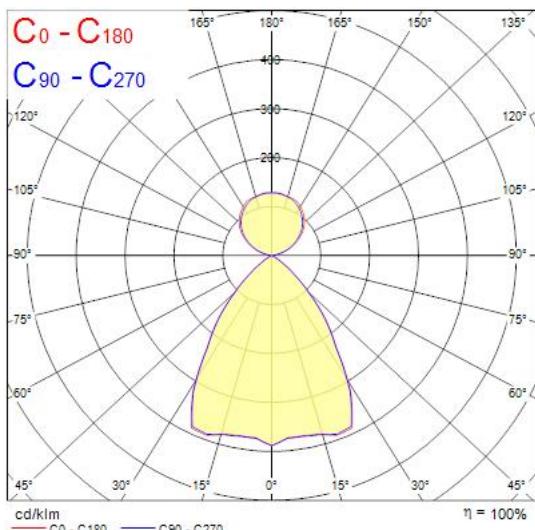

### Technical drawings

