


Optix Linear Surface 1200 Direct-Indirect SylSmart
OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC EM
2023816

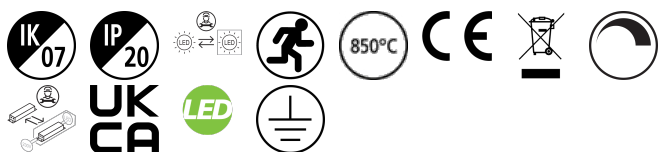

PRODUCT OVERVIEW





Product name	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	85
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238163

PHOTOMETRY

Optix Linear Surface 1200 Direct-Indirect SylSmart

OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC EM

2023816



TECHNICAL DRAWINGS

