

Optix Linear Surface 1200 Direct-Indirect SylSmart
OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC
2023821



PRODUCT OVERVIEW

Product name	OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	116
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG0
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238217

DATA TABLE

General data	
Product name	OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed

Optix Linear Surface 1200 Direct-Indirect SylSmart

OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC

2023821

Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature T _q (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	116
Correlated colour temperature range (K)	3000 - 6000
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.97
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	600
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	90
Weight (kg)	3.55

Optix Linear Surface 1200 Direct-Indirect SylSmart

OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC

2023821



Packaging

Single packaging type	Carton
Product EAN number	5025768238217
Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (outer)	05025768238217
Packaging outer length / height (cm)	119.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

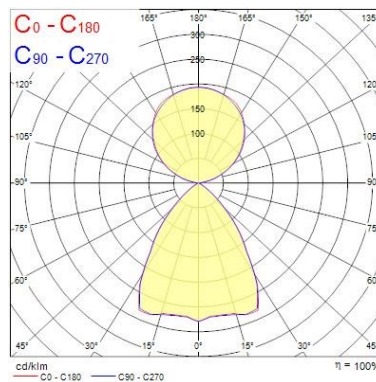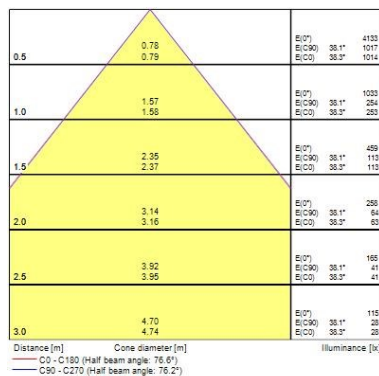

TECHNICAL DRAWINGS

