

27 818 980



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- Function from: 5 l/min
- inherently safe from back flow
- with anti-scale system
- metal shower hose 1250mm with integrated anti-twist protection

**Technical data:**

- cover plate 240 x 60 mm
- 1/2" wall elbow
- 3/8" shower outlet

**Notes:**

	Brushed Gold (PVD)	27 818 980-37 0010
	Chrome	27 818 980-00 0010
	Brushed Platinum	27 818 980-06 0010
	Platinum	27 818 980-08 0010
	Dark Chrome	27 818 980-19 0010
	Brushed Durabronze (23kt Gold)	27 818 980-28 0010
	Matte Black	27 818 980-33 0010
	Brushed Dark Brass (PVD)	27 818 980-39 0010
	Brushed Bronze (PVD)	27 818 980-42 0010
	Brushed Dark Bronze (PVD)	27 818 980-43 0010
	Brushed Champagne (22kt Gold)	27 818 980-46 0010
	Champagne (22kt Gold)	27 818 980-47 0010
	Brushed Chrome	27 818 980-93 0010
	Brushed Dark Platinum	27 818 980-99 0010


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
  - min. recess depth 90 mm
  - max. recess depth 163 mm



27 818 980

mm [inches]

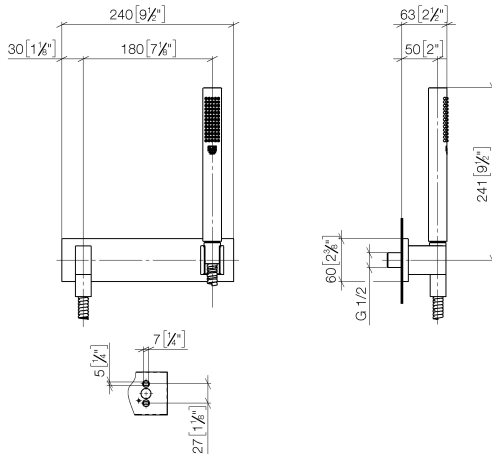

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

Ü-Zeichen

Certificates and sustainability

LGA_29	IAPMO_4976 (
--------	--------------

27 818 980

