



Features

• LED Lantern complete with 60mm side entry spigot and supplied with 0.5 metre mains supply cable, die-cast aluminium housing with flat glass cover, IP66, IK08, Class I, 4000K, CRI80, Non-dimmable, 14700lm, 100W, 147lm/W, SDCM (Standard Deviation of Colour Matching) Macadam ≤ 5 SDCM, Medium Road Lens, 100.000hrs L80B50 lifespan, 575 x 242 x 124mm (LxWxD) dimensions, 3.4kg weight, RAL9022 Pearl light grey colour, 1000 hrs Salt Spray test, Operating temperature range -25°C ..+50°C, 10kV surge protection.


Product Overview

Product name	Zephyr IP66 15klm 840 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Post top
General application	Logistics & Industry
ETIM Class	EC000062
E-number FI	4579672
Fixture luminous flux (lm)	14700
Luminaire efficacy (lm/W)	147
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	150x70
Photobiological Risk Group	RG1
Total power consumption (W)	100
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)

Zephyr IP66 15klm 840 Grey 0050585

Housing colour	RAL9022
IP rating	IP66
IK rating	IK08
Product EAN number	5410288505855
Warranty	5 years
Dimming method	N/A

Photometry

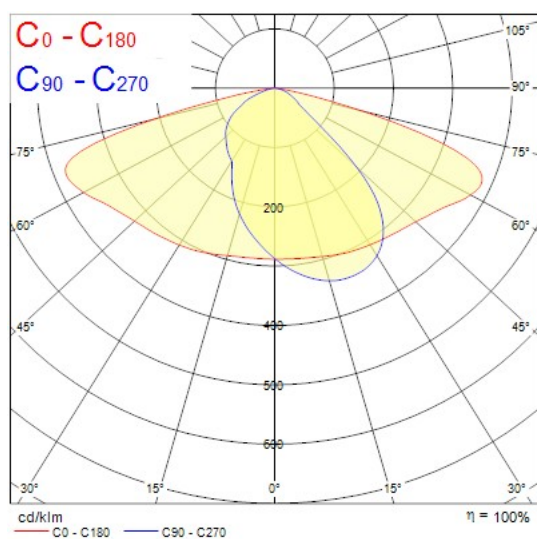

Technical drawings

