

Concord

OPTIX LINEAR SURFACE 1200 TW ALU DALI EM

2023824



Features

- OPTIX LINEAR SURFACE 1200 TW ALU DALI EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Surface and suspended mounting. Size: 1160x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. 3hr maintained emergency version. DALI DT8 colour control and dimming. Tunable white colour 3000-6000K, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2200lm. Power consumption 24W. Luminaire efficacy 92lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Product Overview

| | |
|--|--|
| Product name | OPTIX LINEAR SURFACE 1200 TW ALU DALI EM |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting |
| Fixture rating | Enclosed |
| Fixture luminous flux (lm) | 2200 |
| Luminaire efficacy (lm/W) | 92 |
| Light colour | Tuneable White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 16 |
| Photobiological Risk Group | RG0 |
| Luminous flux (emergency) (lm) | 85 |
| Total power consumption (W) | 24 |

Concord
by SYLVANIA


Concord

OPTIX LINEAR SURFACE 1200 TW ALU DALI EM

2023824

| | |
|-----------------------|----------------------------------|
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5025768238248 |
| Warranty | 5 years |

Photometry

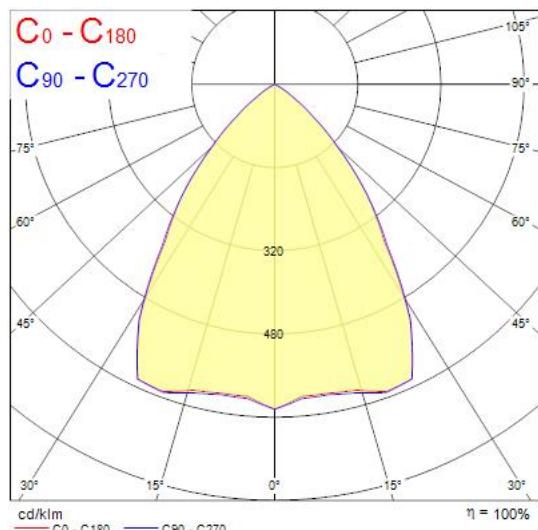

Technical drawings

