Technical data sheet

Round cable terminal from 25 mm² for 1801 VDE

Item number: 5015766



- For single or multi-wire cables 25–95 mm²
- For fine-wire cables to 70 mm² (max. Ø 13.5 mm)
- 2 division units
- Lightning current carrying capacity 100 kA (10/350)
- Electrogalvanised steel
- Tension clamp with screw lock against self-loosening (e.g. required in industry and in explosion-protected areas)

St	Steel
G	Electrogalvanised

Master data

Item number	5015766
Type	1801 RK95
Description 1	Series terminal
Description 2	for equipotential busbar
Manufacturer	OBO
Dimension	95mm²
Material	Steel
Surface	Electrogalvanised
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	10
Unit of quantity	Piece
Weight	4.7 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0927 kg CO2e / 1 Piece

Technical data sheet

Round cable terminal from 25 mm² for 1801 VDE

Item number: 5015766

Dimensions

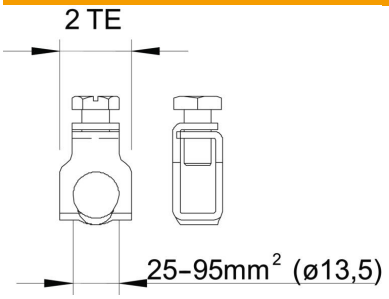

Width	14 mm

Technical data

Connection options	25−95 mm²
Suitable for ribbon conductor connection	no
Suitable for round cable connecti-on	yes
Suitable for sector conductor connection	no
Max. Conductor cross-section	95 mm²
ROHS-conformant	yes
Dividing unit TE (10 mm)	2
Suitable for busbar	Other