

PROLUMIA®

ROCKDISC III

SURFACE MOUNTED LUMINAIRES

ILLUMINATION DESIGNED TO TRANSFORM
THE NOCTURNAL IMAGE OF OUTDOOR SPACES

NOW WITH
SENSELINK SENSOR
WITH WIRELESS
MASTER/SLAVE
FUNCTION




SenseLink

CE

LED

LM

5 YEARS WARRANTY

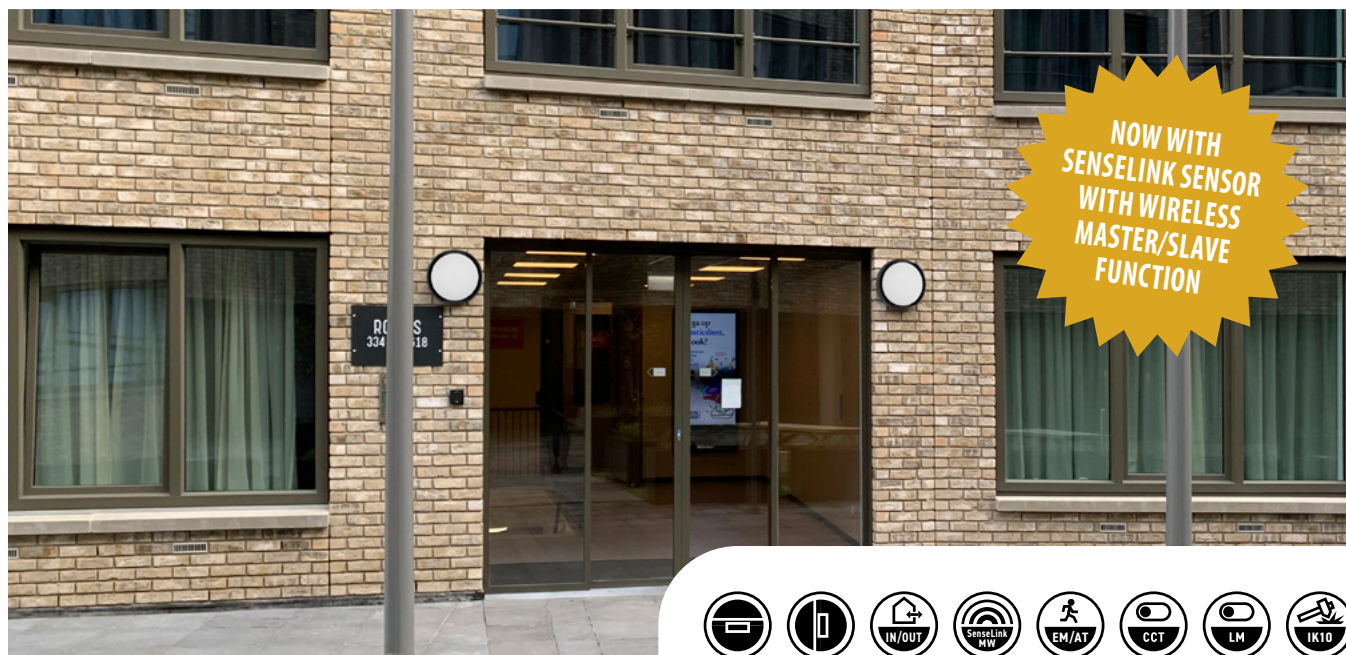


ROCKDISC III

SURFACE MOUNTED LUMINAIRES

ILLUMINATION DESIGNED TO
TRANSFORM THE NOCTURNAL
IMAGE OF OUTDOOR SPACES

Rockdisc III offers an exceptional blend of performance and resilience for outdoor lighting needs. Designed with a focus on durability, it features an impact-resistant polycarbonate diffuser and an aluminium housing, ensuring it can withstand harsh weather conditions with an IP66 protection rating. With various models offering adjustable CCT and output, Rockdisc III provides versatile lighting options for any outdoor space. SenseLink-sensor versions featuring wireless grouping and emergency backup versions complete the range.

MORE INFO ABOUT
ROCKDISC III ONLINE:



SenseLink

FEATURES & PROPERTIES

- High-quality, impact-resistant and weatherproof surface-mounted luminaire
- Aluminium housing with matte black finish
- SenseLink versions with wireless sensor signal transmission
- Adjustable detection range, hold/standby time, and daylight monitoring
- Color temperature and brightness of the light can be adjusted in multiple steps

GENERAL SPECIFICATIONS

Fixture type	Surface-mounted – shielded / non-shielded
Application	Wall, ceiling
Installation environment	Indoor, outdoor
Lighting function	General, functional
Luminaire versions	On/off, SenseLink-sensor, emergency ¹⁾ , SenseLink + emergency ¹⁾
Electrical safety class	Class I
AC-voltage & frequency	220-240 V AC 50-60 Hz, 220 V DC (on/off-versions)
Type of driver	Constant current
Type of light source	LED (type SMD 2835)
Power consumption (range)	4.5 W - 26.0 W
Luminous flux (range)	380 lm - 2,300 lm
Luminous flux adjustable	2 settings ²⁾ / 3 settings ³⁾
Light color	3000 K / 3500 K / 4000 K
Light color adjustable	3 settings
Color Rendering Index	Ra >80
Optical system	Diffuser (opal)
Beam angle	120° round symmetrical
Ingress Protection (IP)	IP66
Impact resistance (IK)	IK10
Median useful life	L90 >50,000 hours L80 >100,000 hours
Ambient temperature (Ta-range)	-25°C to +50°C ⁴⁾
Material	Aluminium housing and PC diffuser
Color/finish	Black / matte, fine-textured
Certification	CE
Warranty period	5 years (3 years on emergency unit battery)

¹⁾ Emergency function only available with Ø 340 mm versions


²⁾ Luminous flux adjustable in 2 settings for Mini versions



³⁾ Luminous flux adjustable in 3 settings with Ø 340 mm versions

⁴⁾ Ambient temperature for emergency versions ≥ -10°C

APPLICATIONS



Entrances, halls, corridors, stairwells, lift lobbies, galleries, porches, balconies, facades, storerooms, toilets, bathrooms, etc.



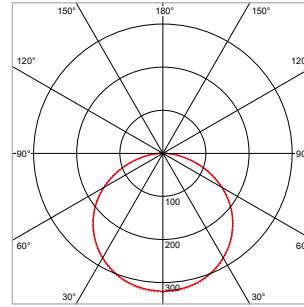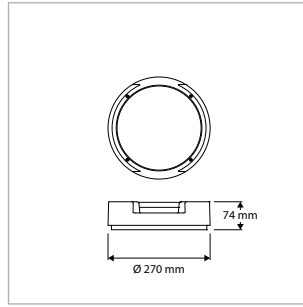

ROCKDISC III MINI - IP66 - SURFACE-MOUNTED - Ø 270 x 74 mm - BLACK



VERSION	CCT	CRI	LIGHT OUTPUT	POWER	DRIVER	ART. NO.	STOCK
Standard	3000 / 3500 / 4000 K	Ra >80	450 / 900 lm	4.5 / 9.0 W	On / Off	40009030	☑
SenseLink-Sensor	3000 / 3500 / 4000 K	Ra >80	450 / 900 lm	5.0 / 9.5 W	On / Off	40009031	☑

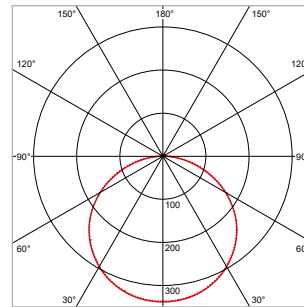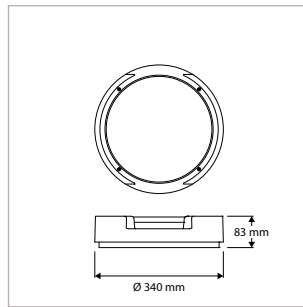

ROCKDISC III - IP66 - SURFACE-MOUNTED - Ø 340 x 83 mm - BLACK



VERSION	CCT	CRI	LIGHT OUTPUT	POWER	DRIVER	ART. NO.	STOCK
Standard	3000 / 3500 / 4000 K	Ra >80	1,000 / 1,500 / 2,300 lm	10.0 / 15.0 / 23.0 W	On / Off	40009180	☑
SenseLink-Sensor	3000 / 3500 / 4000 K	Ra >80	1,000 / 1,500 / 2,300 lm	10.5 / 15.5 / 23.5 W	On / Off	40009181	☑
Emergency	3000 / 3500 / 4000 K	Ra >80	1,000 / 1,500 / 2,300 lm	11.5 / 16.0 / 25.5 W	On / Off	40009182	☑
SenseLink + Emergency	3000 / 3500 / 4000 K	Ra >80	1,000 / 1,500 / 2,300 lm	12.0 / 16.5 / 26.0 W	On / Off	40009183	☑



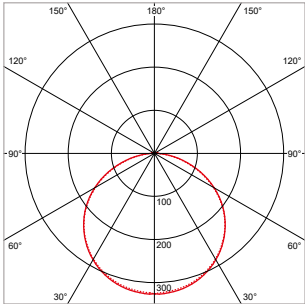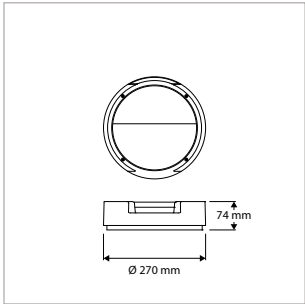

ROCKDISC III MINI - SHIELDED - IP66 - SURFACE-MOUNTED - Ø 270 x 74 mm - BLACK

VERSION	CCT	CRI	LIGHT OUTPUT	POWER	DRIVER	ART. NO.	STOCK
Standard	3000 / 3500 / 4000 K	Ra >80	380 / 750 lm	4.5 / 9.0 W	On / Off	40009035	☑
SenseLink-Sensor	3000 / 3500 / 4000 K	Ra >80	380 / 750 lm	5.0 / 9.5 W	On / Off	40009036	☑



ROCKDISC III - SHIELDED - IP66 - SURFACE-MOUNTED - Ø 340 x 83 mm - BLACK

VERSION	CCT	CRI	LIGHT OUTPUT	POWER	DRIVER	ART. NO.	STOCK
Standard	3000 / 3500 / 4000 K	Ra >80	800 / 1,100 / 1,800 lm	10.0 / 15.0 / 23.0 W	On / Off	40009185	☑
SenseLink-Sensor	3000 / 3500 / 4000 K	Ra >80	800 / 1,100 / 1,800 lm	10.5 / 15.5 / 23.5 W	On / Off	40009186	☑
Emergency	3000 / 3500 / 4000 K	Ra >80	800 / 1,100 / 1,800 lm	11.5 / 16.0 / 25.5 W	On / Off	40009187	☑
SenseLink + Emergency	3000 / 3500 / 4000 K	Ra >80	800 / 1,100 / 1,800 lm	12.0 / 16.5 / 26.0 W	On / Off	40009188	☑

ROCKDISC III - ACCESSORIES

DESCRIPTION	ART. NO.	STOCK
Remote control for SenseLink wireless grouping sensors, incl. battery	40008290	☑



40008290



PROLUMIA®

PROLUMIA NL

Riga 10
2993 LW BARENDRECHT
T +31 (0)180 64 54 00
E info@prolumia.nl

PROLUMIA BE

Saffierstraat 5 - Unit 10A
2200 HERENTALS
T +32 (0)14 25 07 70
E info@prolumia.be

PROLUMIA CZ

Ke Slivenci 48
154 00 PRAHA 5 - LOCHKOV
T +420 222 563 003
E info@prolumia.cz

PROLUMIA DE

Feldbergstraße 57
61440 OBERURSEL
T +49 6171 8989 594
E info@prolumia.de

MORE INFO ABOUT
ROCKDISC III ONLINE:



Version: 1.0 - 2026-03

Nedelko B.V. pays the utmost attention to its catalog and reliability and actuality of the information contained therein. Despite all care, inaccuracies and omissions can not always be prevented. Nedelko B.V. is not liable for errors or inaccuracies. For the most current information please contact our sales department.