

Features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<22. RG0, 112 degree beam angle , optical system: PS diffuser with Opal finish. Light color temperature: 3000K Warm White, total system power: 36W , total fixture output: 3200lm, efficacy: 89 lm/W, Ra80 typical, LED chromacity: 6 step MacAdam ellipse (SDCM6), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, saftey cables included, 25mm nominal height, White color frame, weight: 1,6Kg.

Product Overview


Product name	START Panel 3YW 600x600 3200Lm 830 LILO
Technology	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
E-number FI	4278452
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 22

Light your world


START Panel 3YW 600x600 3200Lm 830 LILO 0042807

Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288428079
Warranty	3 years

Photometry

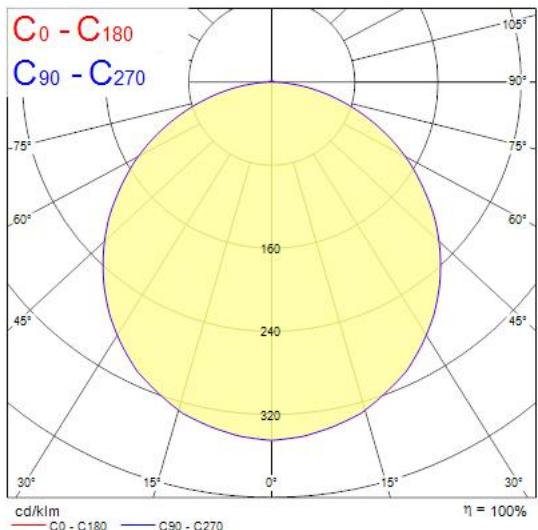

Technical drawings

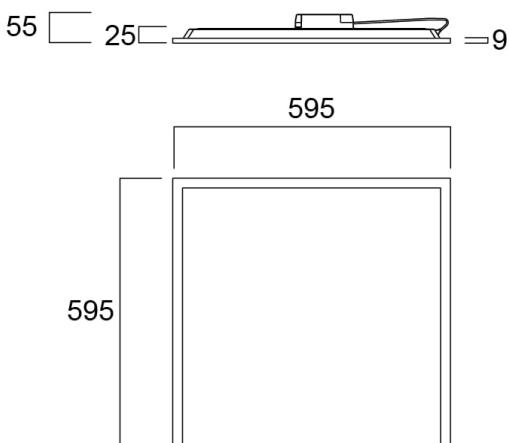

Light your world