

Motion detector, KNX®, 2 channels, 40 m, for corridors, for flush-mounting box, white

350-530311



4 year warranty



KNX®



master/secondary



IP20



10 lx – 2,000 lx, ∞



360°



2 m – 2.5 m



flush-mounting box



The corridor motion detector with two channels is suitable for KNX® systems. It can be installed in a flush-mounting box in the ceiling. Spring clips and an IP54 surface-mounting box can be ordered separately. In conformity with the European directive for EMC and safety EN 60669-2-1.



Colour: white

Compatible secondary detectors:

Compatible master detectors:

- KNX motion detector for corridors
- Tangential detection up to 40 m
- Radial detection up to 16 m
- Master/secondary configuration or stand-alone
- 2 channels for on/off or dimming
- 2 inputs for external NO push buttons, toggling or dimming
- Detection area can be modified by means of an adjustable cover mask
- IP54 surface-mounting box and spring clips available as accessories
- Commissioning via ETS software or IR-remote control (available as accessory)

Detection range

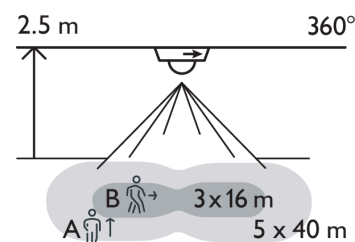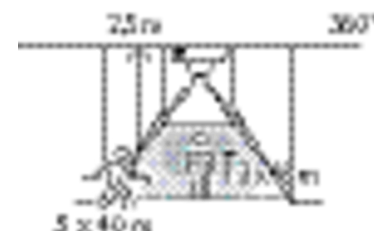


H	A	B
	Across	Towards
2.5 m	5 x 40 m	3 x 16 m

Technical features

Configuration	master/secondary
Input voltage	30 Vdc via KNX®-bus
Detector output	KNX®
Maximum current consumption	10 mA
Switch-off delay	30 sec – 3,600 sec
Maximum power consumption	10 W
Detection angle	360 °
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+45 °C
Mounting method	flush-mounting box
Mounting height	2 m – 2.5 m
Colour	white
Colour RAL (approximately)	9010
Dimensions visible (HxWxD)	105 mm x 105 mm
Dimensions (HxWxD)	105 mm x 105 mm x 60 mm
Protection degree standalone	IP20

Dimensions



Wiring diagram

