

Product data

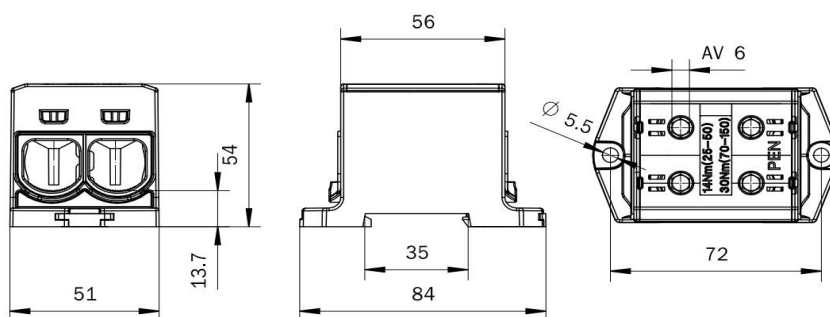
Product code	VC05-0361	STK-code	1914282	EAN-code	6410019142822
Product name	OTL PEN-connector 2xAl/Cu 25-150mm ² (Ye/Gr/Blue)			ETIM class	EC000897
Wires	2xAl/Cu 25-150 mm ²				

Technical data

Nominal current (IEC)	Cu	640	A
	Al	290	A
Nominal voltage (IEC)		1000 V AC / 1500 V DC	
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		150	mm²
Tightening torque			
	25-50 mm²	14	Nm
	70-150 mm²	30	Nm
		-	
		-	
Min. installation temperature		+5	°C
Operating temperature		-25...+80	°C
Weight		170	g
IP-protection		IP20	
		-	
Color / Material	Grey Housing RAL 7035/PA66-V0, Tin plated		
Mounting / Connection	DIN-rail and screw (M5) mounting		


Description

OTL-connectors are designed for connecting and branching aluminium and copper conductors. The body is made of tin plated aluminium. Housing is made of UL94 V0 class polyamide. Made in Finland.

Drawing

Package

Package	Box	Pcs / Package	24	Weight [kg]	2,60
Length [mm]	330	Width [mm]	180	Height [mm]	140

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi