


START Downlight Flat IP44 Dimmable 108MM Round Recessed

START Downlight Flat 108 IP44 600LM 840 DIM
0054119



Product features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate phase dimmable driver and Loop in out box; 7W; 600Lm; 86Lm/W; 4000K; IP44 rated from the front

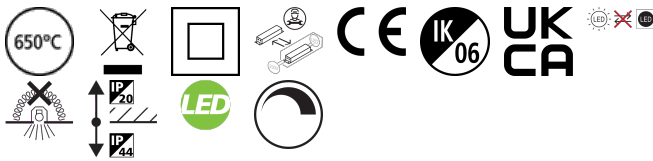

PRODUCT OVERVIEW

Product name	START Downlight Flat 108 IP44 600LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278491
Warranty	5 years
Useful luminous flux (Fuse)	600
Fixture luminous flux (lm)	600
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541198

PHOTOMETRY


START Downlight Flat IP44 Dimmable 108MM Round Recessed

START Downlight Flat 108 IP44 600LM 840 DIM
0054119

0.5	1.41	E:0°	81
	1.43	E:C90	85
		E:C0	82
1.0	2.81	E:0°	202
	2.86	E:C90	21
		E:C0	21
1.5	4.22	E:0°	96
	4.28	E:C90	17
		E:C0	9
2.0	5.63	E:0°	66
	5.71	E:C90	9
		E:C0	5
2.5	7.04	E:0°	36
	7.14	E:C90	3
		E:C0	3
3.0	8.44	E:0°	24
	8.57	E:C90	1
		E:C0	1

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.2°)
— C90 - C270 (Half beam angle: 109.2°)



TECHNICAL DRAWINGS

