



Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 30W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; through wiring.

Product Overview

Product name	Resisto 1500 IP66 4200lm 840 5xTH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
E-number FI	4357062
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

Resisto 1500 IP66 4200lm 840 5xTH 0010251

Housing colour Grey


IP rating IP66

IK rating IK08


Product EAN number 5410288102511

Warranty 5 years

Photometry

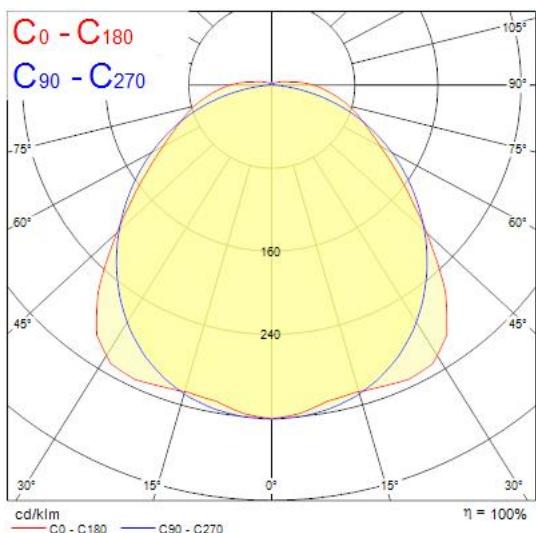

Technical drawings

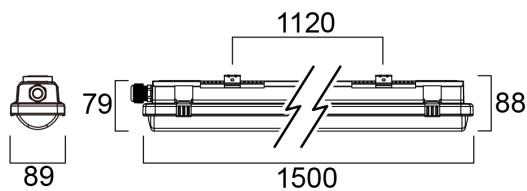

Light your world