




Features

- High performance LED PAR38 lamp with the same look and feel of traditional PAR lamps Glass construction - means no colours clashing between the lamp and fixture Reduced visible heatsink from the front Mercury-free solution Lower maintenance cost RefLED™ RT PAR38 IP65 is also suitable for outdoor applications when used with IP65 rated luminaires Lifetime: up to 25,000 hours High lumen efficacy Dimmable with approved dimmers* 3 year warranty Suitable for general lighting and accent lighting for hotels, restaurants, bars, lobbies, corridors and halls

Product Overview

Product name	RefLED Retro PAR38 V2 DIM 1200L 840 IP65 40 SL
Technology	LED
Watt (Rated) (W)	15
Fixture rating	Open
E-number FI	4741083
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	15
Product EAN number	5410288292014
Warranty	3 years

Technical drawings

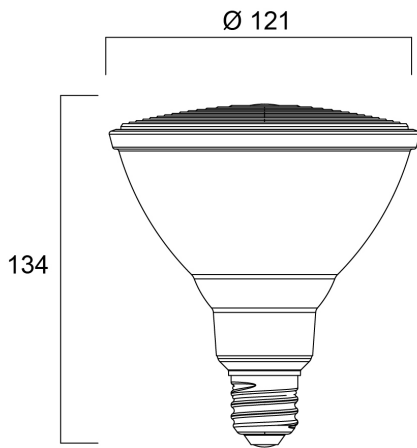

Data table

GENERAL DATA

Product name	RefLED Retro PAR38 V2 DIM 1200L 840 IP65 40 SL
Technology	LED
Watt (Rated) (W)	15
Fixture rating	Open
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4741083
Warranty	3 years

OPTICAL DATA

RefLED Retro PAR38 V2 DIM 1200L 840 IP65 40 SL 0029201

Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Luminous Intensity (cd)	2400
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Wattage (W)	15
Equivalent watt (W)	140
Primary Supply/Product voltage - min (V)	220
Control gear required	No
Inrush Current (A)	2.4
Inrush Duration (μ s)	50
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	134
Nominal Product Diameter (mm)	121
Weight (kg)	0.4

PACKAGING

Single packaging type	Carton
Product EAN number	5410288292014
Packaging single width (cm)	13.4
Packaging single depth (cm)	15.0
DUN14 (outer)	15410288292011

SYLVANIA

RefLED Retro PAR38 V2 DIM 1200L 840 IP65 40 SL
0029201

Packaging outer length / height (cm)	43.7
--------------------------------------	------

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not Suitable for totally enclosed fixtures

Energy label




0029201



15
kWh/1000h



0029201

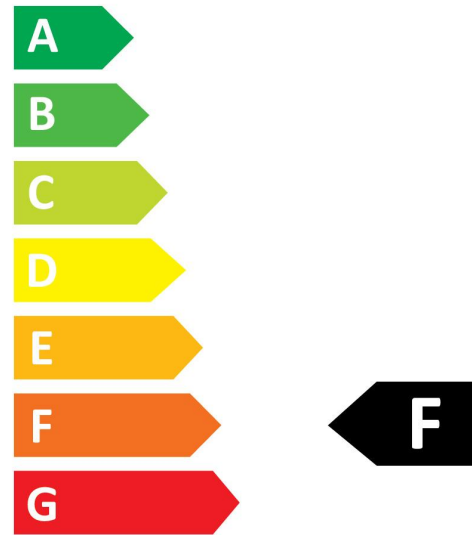

15
kWh/1000h



Light your world