


Data Sheet | Item Number: 722-143/005-000


Female connector for rail-mount terminal blocks; 0.6 x 1 mm pins; straight; 100% protected against mismating; Pin spacing 5 mm; 13-pole; light gray

<https://www.wago.com/722-143/005-000>

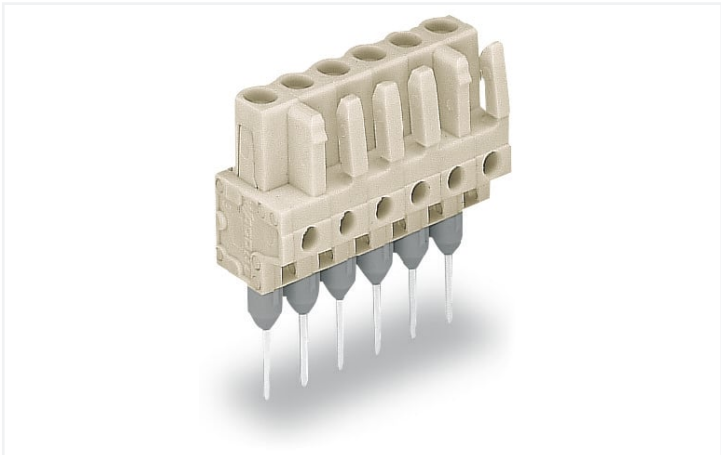


Color: ■ light gray

Similar to illustration

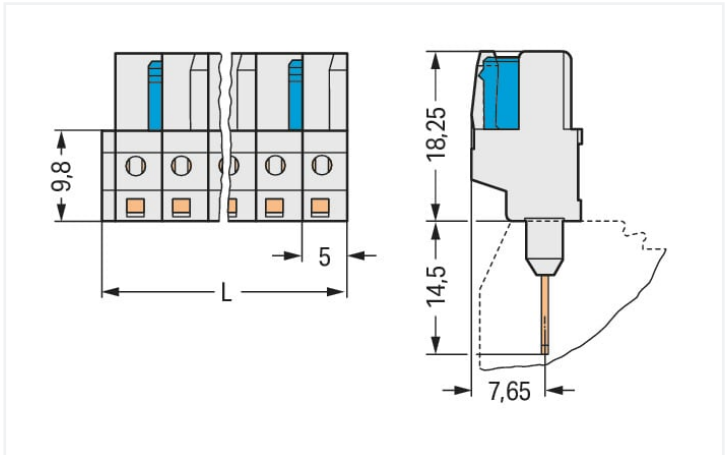

Dimensions in mm
L = (pole no. x pin spacing) + 1.5 mm
2-pole female connectors – one latch only

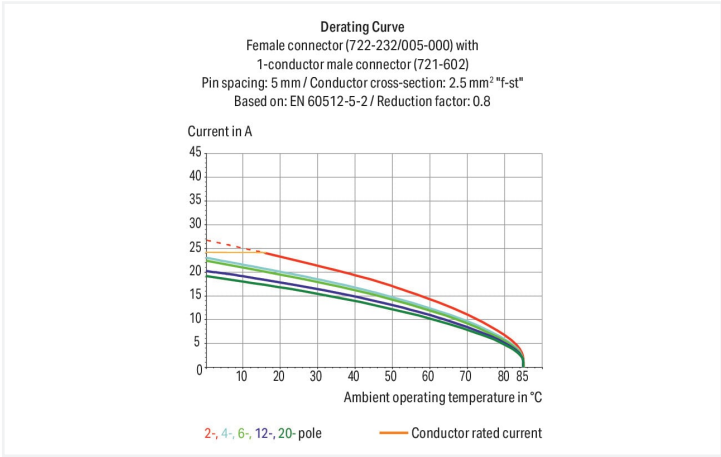

- Pluggable connectors for rail-mount terminal blocks equipped with CAGE CLAMP® connection
- Female connectors with long contact pins connect to the termination ports of 280 Series Rail-Mount Terminal Blocks
- Female connectors are touch-proof when unmated, providing a pluggable, live output
- 100 % protected against mismating
- With coding fingers

Notes	
Safety information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .



Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	320 V	320 V	630 V	
Rated surge voltage	4 kV	4 kV	4 kV	
Rated current	12 A	12 A	12 A	
Approvals per		UL 1977		
Rated voltage	600 V			
Rated current	15 A			
Approvals per		UL 1059		
Use group	B	C	D	
Rated voltage	300 V	-	300 V	
Rated current	15 A	-	10 A	
Approvals per		CSA		
Use group	B	C	D	
Rated voltage	300 V	-	300 V	
Rated current	15 A	-	10 A	
Connection data				
Connection points	13	Connection 1		
Total number of potentials	13	Pole number	13	
Number of connection types	1			
Number of levels	1			
Physical data				
Pin spacing	5 mm / 0.197 inches			
Width	56.5 mm / 2.224 inches			
Height	32.75 mm / 1.289 inches			
Height from the surface	18.25 mm / 0.719 inches			
Depth	11.6 mm / 0.457 inches			
Mechanical data				
Variable coding	Yes			
Anti-rotation protection	Yes			
Plug-in connection				
Contact type (pluggable connector)	Female connector/socket			
Connector (connection type)	for front-entry rail-mount terminal block			
Mismating protection	Yes			
Mating direction to the rail-mount terminal block	90 °			
Material data				
Note (material data)	Information on material specifications can be found here			
Color	light gray			
Material group	I			
Insulation material	Polyamide (PA66)			
Flammability class per UL94	V0			
Contact material	Copper alloy			
Contact plating	Tin			
Fire load	0.367 MJ			
Weight	13.5 g			



Environmental requirements	
Limit temperature range	-60 ... +85 °C
Processing temperature	-35 ... +60 °C

Commercial data	
Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821005056
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates			
General approvals		Approvals for marine applications	
  		  	
Approval	Standard	Certificate Name	
CB DEKRA Certification B.V.	IEC 61984	NL-39756/A1	
CSA DEKRA Certification B.V.	C22.2	1466354	
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-121453	
UR Underwriters Laboratories Inc.	UL 1977	E45171	
Approval	Standard	Certificate Name	
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA	
BV Bureau Veritas S.A.	IEC 60998	11915/D0 BV	
DNV DNV GL SE	-	TAE000016Z	

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 722-143/005-000	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	

CAD/CAE-Data

CAD data
2D/3D Models 722-143/005-000

CAE data
ZUKEN Portal 722-143/005-000

1 Compatible Products

1.1 System counterpart

1.1.1 Male connector/plug



[Item No.: 721-613](#)
1-conductor male connector; CAGE CLAMP®; 2.5 mm²; Pin spacing 5 mm; 13-pole; 100% protected against mismatching; 2,50 mm²; light gray

1.2 Optional Accessories

1.2.1 Installation

1.2.1.1 Empty housings



[Item No.: 280-902/056-000](#)
Spacer of same profile; suitable for 2-conductor terminal blocks of horizontal type; orange



[Item No.: 280-654/056-000](#)
Spacer of same profile; suitable for 3- and 4-conductor terminal blocks of angled type; orange



[Item No.: 280-650/056-000](#)
Spacer of same profile; suitable for 3-conductor terminal blocks of horizontal type; orange



[Item No.: 280-835/056-000](#)
Spacer of same profile; suitable for 4-conductor terminal blocks of horizontal type; orange

1.2.2 Test and measurement

1.2.2.1 Testing accessories



[Item No.: 210-136](#)
Test plug; 2 mm Ø; with 500 mm cable; red



[Item No.: 231-661](#)
Test plugs for female connectors; for 5 mm and 5.08 mm pin spacing; 2,50 mm²; light gray

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com