


# Motion detector, Niko Home Control, 16 m, 180°, IP54, with orientable lens, for surface mounting, white

550-20200



Niko Home Control	master/secondary	IP54	180°	ø 16 m from a height of 3 m	2 m - 3 m	surface-mounting




This motion detector is suitable for outdoor use, for example, along the driveway, on the terrace or in the garden. It is also equipped with a built-in light sensor. You aim the motion detector wherever you wish and partition the detection area using a cover mask. The Niko Home Control system supplies power to the device.

Colour: white

Compatible secondary detectors: 550-20200

Compatible master detectors:

## Detection range

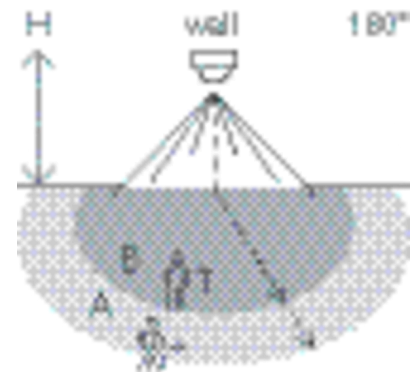

H	A Across	B Towards
2 m	11 m	5.5 m
2.5 m	14 m	7 m
3 m	16 m	8 m

## Technical features

Compatible secondary detectors	550-20200
Configuration	master/secondary
Input voltage	26 Vdc
Detector output	26V
Switch-off delay	8 sec – 1,800 sec
Detection angle	180 °
Detection range (PIR)	ø 16 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+45 °C
Mounting method	surface mounting
Mounting height	2 m – 3 m
Colour	white
Dimensions visible (HxWxD)	70 mm x 90 mm
Dimensions (HxWxD)	70 mm x 90 mm x 130 mm
Protection degree standalone	IP54

## Dimensions

