

1. USE

Cat. 6A cables with 4 twisted pairs. 100 ohms very high speed. for horizontal floor or backbone distribution. This cables enable the use of protocols supported by Class EA for 10G Base-T applications. It is characterised up to 500 MHz


802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

1.1 Particularities

- U/UTP cable with a continuous strip section ensuring no shielding continuity. This strap allows a reduced external diameter of the cable compared to the solutions usually proposed in Cat 6A U/UTP ; serves as protection against external disturbances (Aliencrosstalk) and above all makes it possible to reach a high EUROCLASS level within the framework of the RPC:Cca s1a d1 a1

- Cable to be connected to UTP sockets
- For optimum use, cut the strip flush with the sheath.

2. DESCRIPTION

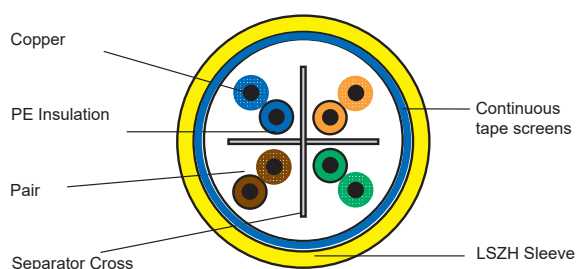

3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (length in meters).

Complementary marking (on label)

- Designation
- Made in....

4. PERFORMANCE AT 500 MHZ (STAND. ISO/IEC 11801)

Reference	0 328 38
Maximum attenuation (dB/100 m)	45.3
Minimum NEXT (dB)	34.8
PS NEXT (dB)	31.8
ACRF (dB / 100 m)	14
PS ACRF (dB / 100 m)	11
Return Loss (dB)	17.3

5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 328 28
Type	U/UTP
Type of sleeve	LSZH
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1.03 ± 0.02 (orange/brown) 0.95 ± 0.02 (bleu/green)
Average nominal diameter of the cable (mm)	7.1±0.3
Weight of cable (kg/km)	51
Min. bending radius when laying (mm)	59
AWG gauge*	23

* According to UL 444 ed.3 table 4

6. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 328 28
Type	U/UTP
Maximum linear resistance (ohm/km)	81 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
« Nominal Velocity of Propagation (NVP) »	73 %
Characteristic impedance at 100 MHz	100 ±5Ω

* According to standard IEC 61156-5

7. ORDERING INFORMATION

Catalogue number	0 328 28
Type	U/UTP
Colour	Yellow RAL 1018
Pack (m)	500
Packaging	Reel

8. ENVIRONMENTAL FEATURES

Transport and storage temperature: 0 to + 50 °C
 Storage temperature before use: 10°C during 24h (if stock ≤ 5°C)
 Usage temperature: – 20 to + 60 °C
 Fire rating:EN 50399. IEC 60332-1-2. EN 60332-1-2
 Smoke density : IEC 61034-2. EN 61034-2. IEC 60332-3-24
 Toxicity of fire effluent : IEC 60754-2. EN 60754-2
 EUROCLASS EN 13501-6 = Class Cca s1a. d1. a1
 Also compliant with Dca and Eca

9. STANDARDS AND APPROVALS

Cat 6A. 500 MHz
 Electrical performances and characteristics :
 ISO/IEC 11801 series : International standard for generic cabling for customer premises
 EN 50173 series : European standard for generic cabling for customer premises
 IEC 61156 : International standard for twisted pair cable specifications
 IEEE 802.3af . IEEE 802.3at . IEEE 802.3bt : "Power over Ethernet". Types 1 to 4. up to 90W