

Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; microwave motion sensor corridor function with 10 minutes stand-by time and 10% stand-by level.


Product Overview

Product name	Resisto 1500 IP66 MWcor 7600lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Fixture luminous flux (lm)	7600
Luminaire efficacy (lm/W)	138
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	55
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey

Resisto 1500 IP66 MWcor 7600lm 840
0010258

IP rating	IP66
IK rating	IK08
Product EAN number	5410288102580
Warranty	5 years

Photometry

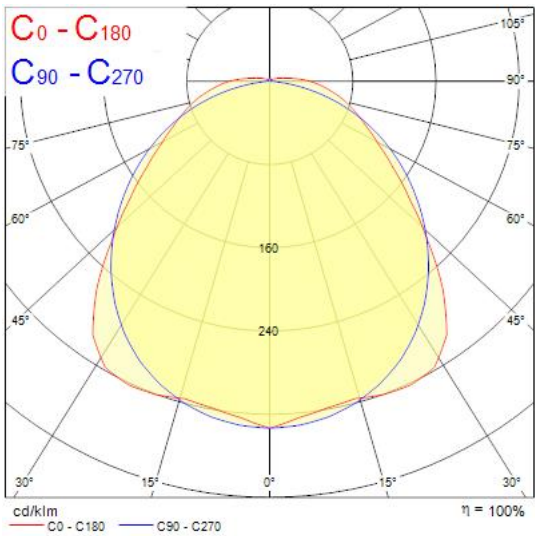

Technical drawings

