

Optix Linear Surface 1200 Direct-Indirect
OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU
2023857



PRODUCT OVERVIEW

Product name	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	4020
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238576

DATA TABLE

General data	
Product name	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting

Optix Linear Surface 1200 Direct-Indirect

OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU

2023857

Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4020
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	36
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	250
Inrush Current (A)	30
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	F, F(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	15
Max. products per 20A B Breaker	18

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	90
Weight (kg)	3.5

Packaging

Single packaging type	Carton
Product EAN number	5025768238576



Optix Linear Surface 1200 Direct-Indirect

OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU

2023857

Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (outer)	05025768238576
Packaging outer length / height (cm)	119.0

PHOTOMETRY

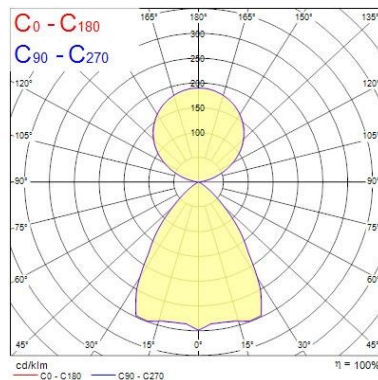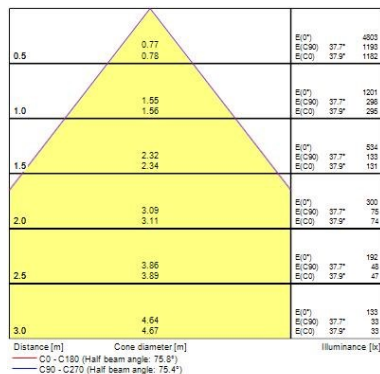

TECHNICAL DRAWINGS

