


Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK

2059642

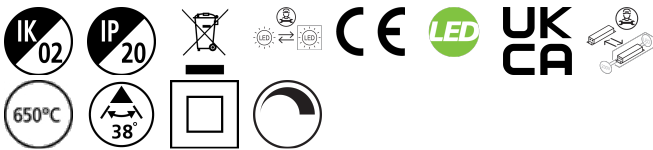

PRODUCT OVERVIEW

Product name	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596423

DATA TABLE

General data	
Product name	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal

Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
2059642

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7


Packaging

Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
2059642

Single packaging type	Carton
Product EAN number	5025768596423
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596423
Packaging outer length / height (cm)	16.0

PHOTOMETRY

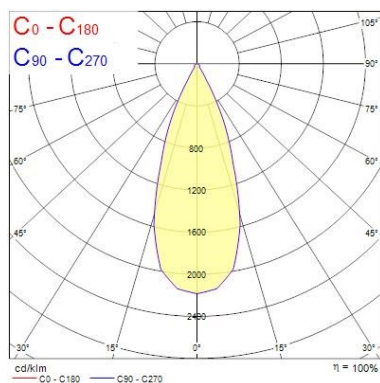

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.35	19.1°	19.1°	1569
1.0	0.69	19.1°	19.1°	4117
1.5	1.04	19.1°	19.1°	1830
2.0	1.39	19.1°	19.1°	1029
2.5	1.73	19.1°	19.1°	659
3.0	2.08	19.1°	19.1°	457

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 38.2°)

TECHNICAL DRAWINGS

