


Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM WHITE

2059643

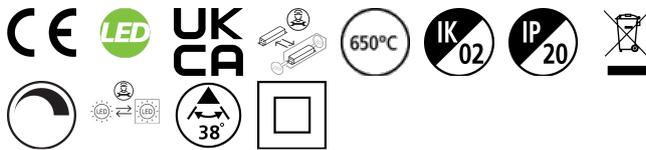

PRODUCT OVERVIEW

Product name	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596430

DATA TABLE

General data

Product name	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal

Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM WHITE

2059643

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

Packaging

Beacon LED

BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM WHITE
2059643


Single packaging type	Carton
Product EAN number	5025768596430
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596430
Packaging outer length / height (cm)	16.0

PHOTOMETRY

0.5	0.35	E(0°) E(C0)	19.1°	16469 7009
1.0	0.69	E(0°) E(C0)	19.1°	4117 1752
1.5	1.04	E(0°) E(C0)	19.1°	1530 779
2.0	1.39	E(0°) E(C0)	19.1°	1029 498
2.5	1.73	E(0°) E(C0)	19.1°	659 290
3.0	2.08	E(0°) E(C0)	19.1°	457 195

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 38.2°)

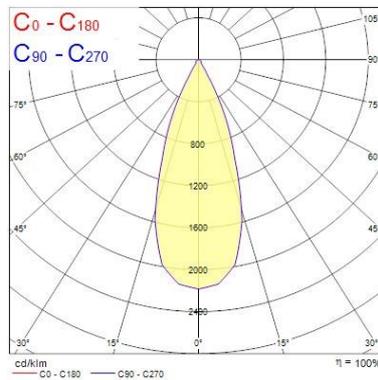

TECHNICAL DRAWINGS

