



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 59W; 129lm/W; 4000K; SDCM<5; CRI80; IP65; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 87mm x 80mm; D-mark; SylSmart Standalone enabled, with batten mount PIR sensor.


Product Overview

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Product name                    | Resisto 1500 IP65 7600lm 840 SSC S                        |
| Technology                      | LED                                                       |
| Cap/Base                        | N/A                                                       |
| Housing                         | PC Polycarbonate                                          |
| Mount                           | Ceiling surface mounting, Suspended, Wall surface mounted |
| Fixture luminous flux (lm)      | 7600                                                      |
| Luminaire efficacy (lm/W)       | 129                                                       |
| Colour temperature (K)          | 4000                                                      |
| CRI (Ra)                        | 80                                                        |
| Colour Consistency (SDCM)       | 5                                                         |
| Colour Variation Initial (SDCM) | 5                                                         |
| Glare control                   | < 25                                                      |
| Photobiological Risk Group      | RG1                                                       |
| Total power consumption (W)     | 59                                                        |
| Electrical protection           | Class I                                                   |
| Control gear type               | LED driver constant current                               |
| LED Flickering Rate             | Ultra low (5% or less)                                    |

Resisto 1500 IP65 7600lm 840 SSC S  
**0010265**

|                           |               |
|---------------------------|---------------|
| <b>Housing colour</b>     | Grey          |
| <b>IP rating</b>          | IP65          |
| <b>IK rating</b>          | IK08          |
| <b>Product EAN number</b> | 5410288102658 |
| <b>Warranty</b>           | 5 years       |

## Photometry

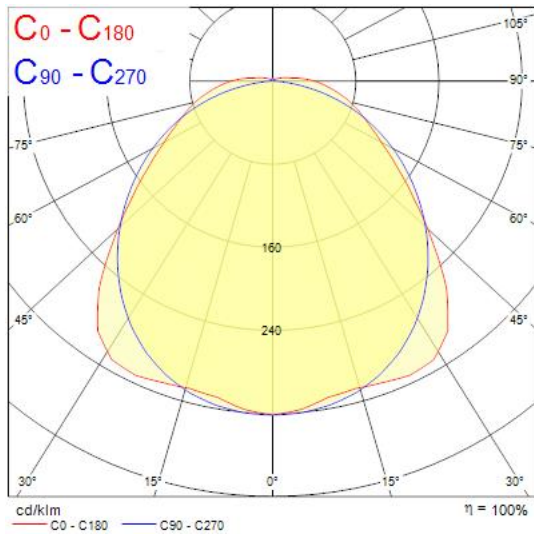

## Technical drawings

