

Concord

OFFICELYTE 1200 3000K HE SSA01D
2069549



Features

• Concord OFFICELYTE 1200 3000K HE SSA01D is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 1196x296x60mm dimensions. 3300lm luminous flux, 28W total power consumption, 118lm/W efficacy level, CRI80 3000K (Warm white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class II electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. SylSmart Connected enabled BT driver.

Product Overview


| | |
|-----------------------------------|---------------------------------|
| Product name | OFFICELYTE 1200 3000K HE SSA01D |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Office, Education |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 3, 300 |
| Luminaire efficacy (lm/W) | 118 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |

Concord

OFFICELYTE 1200 3000K HE SSA01D 2069549

| | |
|-----------------------------|-----------------------------|
| Beam Angle (°) | 80 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 28 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | RAL9016 |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5025768695492 |
| Warranty | 5 years |
| Dimming method | SylSmart SSA |

Photometry

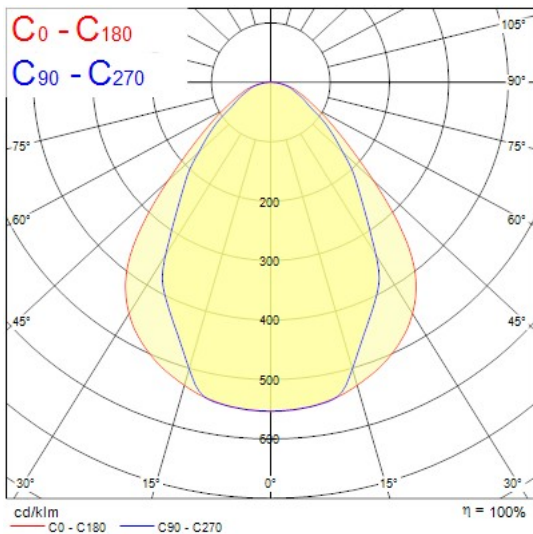

Technical drawings

