

Pluggable Single and Multi-Pole SPD

ProTec T2H 4+0

Class II • Type 2



Location of Use: Sub-Distribution Boards
 Network Systems: TN-S
 Mode of Protection: L-PE, N-PE
 Surge Ratings: $I_n = 20 \text{ kA (8/20 }\mu\text{s)}$
 $I_{max} = 50 \text{ kA (8/20 }\mu\text{s)}$
 IEC/EN Category: Class II / Type 2
 Protective Elements: High Energy MOV in series with GDT
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012

Technical Data

ProTec T2H-xxx-4+0(-R)

300

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o/U_n	240V
Maximum Continuous Operating Voltage (AC)	U_c	300V
Nominal Discharge Current (8/20 μs)	I_n	20kA
Maximum Discharge Current (8/20 μs)	I_{max}	50kA
Voltage Protection Level	U_p	1500V
Response Time	t_A	< 25 ns
Back-Up Fuse (max)		315 A / 250 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	25 kA / 50 kA
TOV Withstand 120min	U_T	442 V
Number of Ports		1

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Altitude		13123 ft [4000m]
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)

Order Information


Order Code	300
ProTec T2H-xxx-4+0	59.0330
ProTec T2H-xxx-4+0-R (with remote contacts)	59.0331
ProTec T2H-xxx-P	59.0322

ProTec T2H 4+0


Internal Configuration

Legend

- L* Line
- N* Neutral
-  Protective Earth
- RC* Remote Contacts Optional

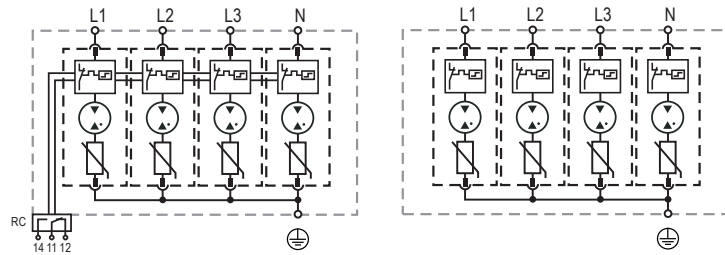

Dimensions & Packaging

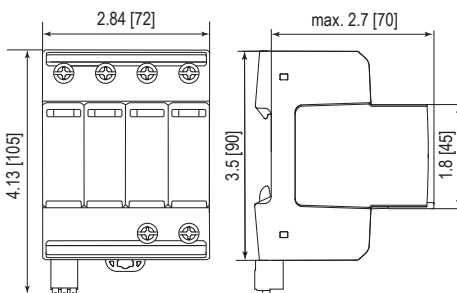


Dimensions & Packaging


ProTec T2H-xxx-4+0	300
Single Unit Weight	pounds [grams] 1.129 [512]
ProTec T2H-xxx-4+0-R	300
Single Unit Weight	pounds [grams] 1.149 [521]
Single Unit DIN 43880 Dimension	4 TE
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Minimum Order Quantity	4 Units

Plug Internal Configuration

ProTec T2H-xxx-P



Dimensions & Packaging



Dimensions & Packaging

ProTec T2H-xxx-P	300
Single Unit Weight	pounds [grams] .144 [65]
Single Unit DIN 43880 Dimension	1 TE
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Minimum Order Quantity	24 Units

inches
[mm]

Information contained in this document is subject to
change at any time without notice.

RoHS
COMPLIANT  CE

Raycap

www.raycap.com

© 2018 Raycap All rights reserved.
G29-00-428 180216