



Location of Use: Sub-Distribution Boards
 Network Systems: TN-C
 Mode of Protection: L-PEN
 IEC/EN Category: Class II+III / Type 2+3
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012+A11:2018

Technical Data**ProTec T2F-xxx-3+0(-R)****300****IEC Electrical**

Nominal AC Voltage (50/60Hz)	U_o / U_n	240V
Maximum Continuous Operating Voltage (AC)	U_c	300V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	40 kA
Voltage Protection Level	U_p	1500V
Open Circuit Voltage of Combination Wave Generator (1.2/50 μ s)	U_{oc}	6 kV
Short Circuit Current of Combination Wave Generator (8/20 μ s)	I_{cw}	3 kA
Response Time	t_A	< 25ns
Overcurrent Protection		Not Required
Short-Circuit Current Rating (AC)	I_{SCCR}	50 kA
TOV Withstand 5s	U_T	337V
TOV 120min	U_T	442V
	mode	Safe Fail
Number of Ports		1

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Altitude (max)		13123 ft [4000m]
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)

Order Information


Order Code	300
ProTec T2F-xxx-3+0	59.A254
ProTec T2F-xxx-3+0-R (with remote contacts)	59.A255
ProTec T2F-xxx-P (plug)	59.A258

ProTec T2F 3+0


Internal Configuration

Legend

- L Line Conductor Terminal
- PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect
- F Integrated Surge Adapted Backup Fuse

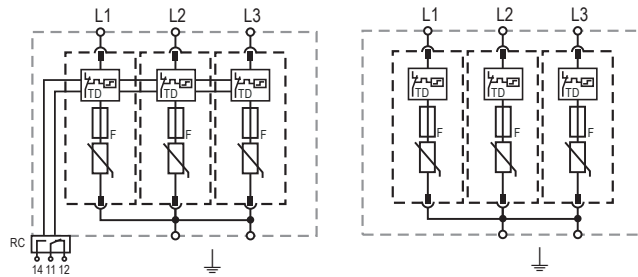

Complete Unit

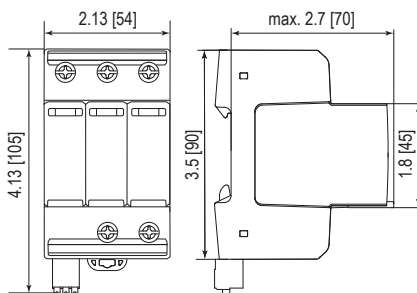


Complete Unit Dimensions & Packaging


ProTec T2F-xxx-3+0		300
Weight	pounds	.875
	grams	397
ProTec T2F-xxx-3+0-R		
Weight	pounds	.897
	grams	407
DIN 43880 Dimension	3 TE / 2.13" [54]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	5 Units	

Plug Internal Configuration

ProTec T2F-xxx-P



Spare Plug



Single Unit Dimensions & Packaging

ProTec T2F-xxx-P		300
Weight	pounds	.152
	grams	69
DIN 43880 Dimension	1 TE / .71" [18]	
Packaging Dimensions (HxWxL)	3.2 x 4.5 x 12" [83 x 115 x 305 mm]	
Standard Order Quantity	24 Units	

inches
[mm]

Information contained in this document is subject to change at any time without notice.

