

## Contact us

**ABB Oy**

Muottitie 2A 65320

Vaasa, Finland


[abb.com/lowvoltage](http://abb.com/lowvoltage)




© Copyright 2025 ABB. All rights reserved.  
Specifications subject to change without notice.

34OT\_G2-68 rev. C / 1SCC301135M0201 # 04.04.2025

## OT Plus OT63...80G2- & OTC63...80G2-

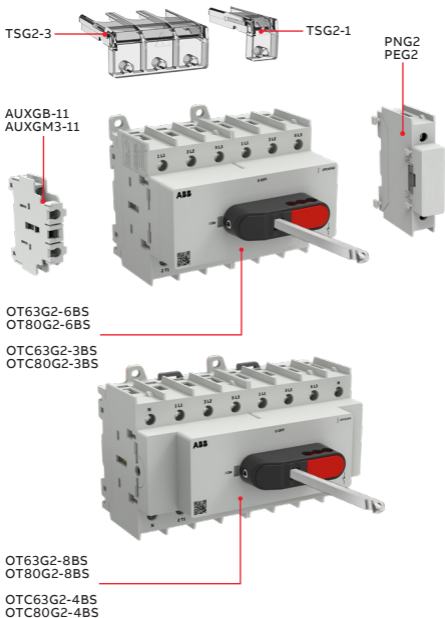


## Mounting

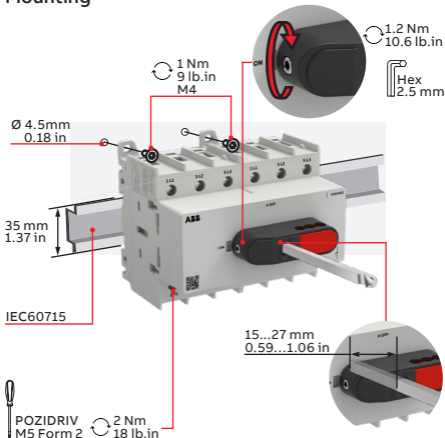


## Padlock



## Adjustable neutral pole timing

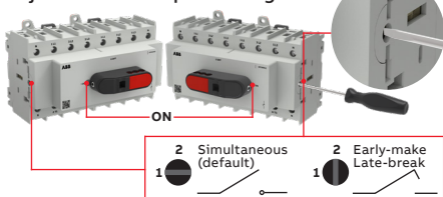

## Clearances per UL60947-4-1



Wire type (Cu only)	1 Wire (mm <sup>2</sup> )	2 Wire (mm <sup>2</sup> )	Stripping length	Tightening torque
Class 5-Flexible	1.5-35	1.5-16		
Class 2-Stranded	1.5-35	1.5-16		
Class 6-Very flexible with ferrule	1.5-4	1.5-4	13-16 mm 0.51- 0.63 in	2 Nm 18 lb.in
Class 1-Solid	1.5-6	1.5-6		
UL - CU wire size (AWG)	16-2	16-8		

## OTC63...80G2-

Switch I			
Switch II			



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

