

# Concord

MC2 D/I 1.2M 4K DALIEM WHT OPAL  
2071459



## Features

- MC2 D/I 1.2M 4K DALIEM WHT OPAL LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 30W, total fixture output: 4050lm, emergency output: 147lm, luminaire efficacy: 135lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, integral emergency: 3 hour maintained, electrical protection: CLASS I, ingress protection rating: IP20, suitable for internal environment only.

## Product Overview


<b>Product name</b>	MC2 D/I 1.2M 4K DALIEM WHT OPAL
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Suspended
<b>General application</b>	Education, Hospitality, Office, Retail
<b>ETIM Class</b>	EC001743
<b>Fixture luminous flux (lm)</b>	4050
<b>Luminaire efficacy (lm/W)</b>	135
<b>LOR (%)</b>	100
<b>Correlated colour temperature (k)</b>	4000

# Concord

## MC2 D/I 1.2M 4K DALIEM WHT OPAL 2071459

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	147
Luminous flux (emergency) (lm)	147
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5025768714599
Warranty	5 years
Dimming method	DALI

### Photometry

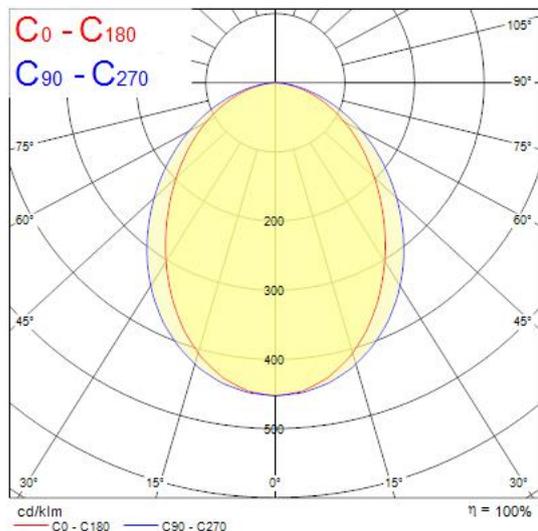

### Technical drawings

