


# Concord

## MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464



### Features

- MC2-KIT D/I 2.4M 4K DALI WHT PRIS LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 4000K neutral white, total system power: 58W, total fixture output: 7700lm, luminaire efficacy: 133m/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.

### Product Overview


Product name	MC2 D/I KIT 2.4M 4K DALI WHT PRIS
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001743
E-number FI	4170305
Fixture luminous flux (lm)	7700
Luminaire efficacy (lm/W)	133
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White

# Concord

## MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	58
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	Electronic ballast
<b>Dimmable</b>	Yes
<b>Minimum dimming level (%)</b>	1
<b>Housing colour</b>	White
<b>IP rating</b>	IP20
<b>IK rating</b>	IK03
<b>Product EAN number</b>	5025768714643
<b>Warranty</b>	5 years
<b>Dimming method</b>	DALI


### Photometry

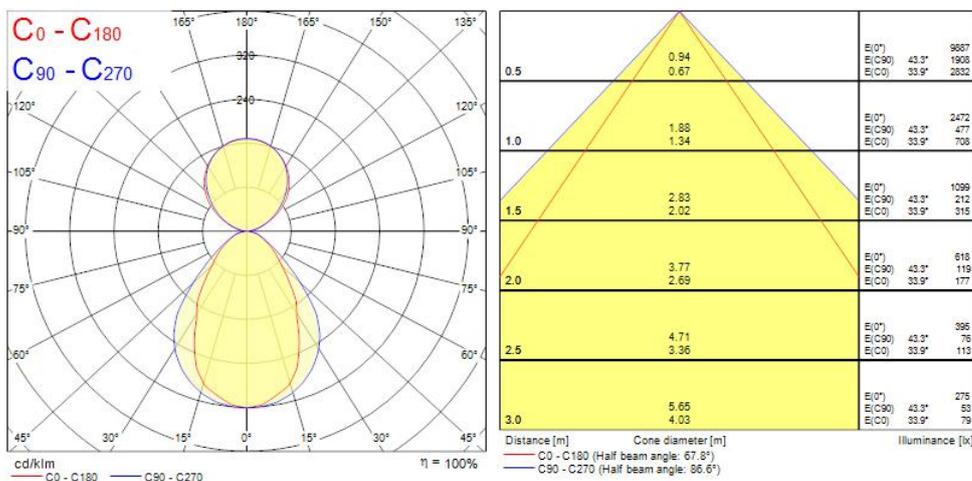

# Concord

## MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

### Technical drawings

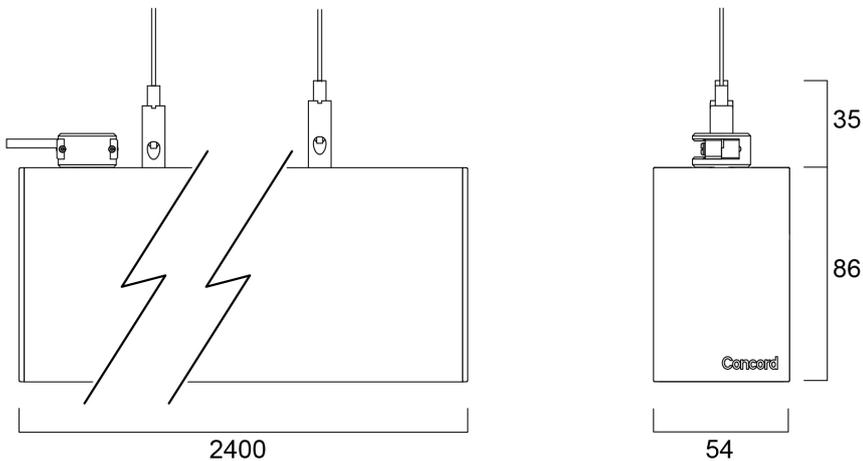

### Data table

#### GENERAL DATA

Product name	MC2 D/I KIT 2.4M 4K DALI WHT PRIS
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
Operating temperature range (°C)	1°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number FI	4170305
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	7700
Luminaire efficacy (lm/W)	133

# Concord

## MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Luminous Intensity (cd)	2472
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	58
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Min. drive current (mA)	350
Max. drive current (mA)	1050
Drive current - Range (mA)	350mA / 1050mA
Inrush Current (A)	53
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	C, B(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	15
Max. products per 16A C Breaker	48
Max. products per 16A B Breaker	15

# Concord

## MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5
--	-----

### LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	92500
Lifespan L90 B10	66000

### PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	2400
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	5.56

### PACKAGING

Product EAN number	5025768714643
Packaging single length / height (cm)	256.0
Packaging single width (cm)	15.0
Packaging single depth (cm)	15.0
DUN14 (inner)	05025768714643
Units per outer package	1
Packaging outer length / height (cm)	256.0
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	15.0

### SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

# Concord

MC2 D/I KIT 2.4M 4K DALI WHT PRIS  
**2071464**

Optimal operating condition (°C)	1-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No