
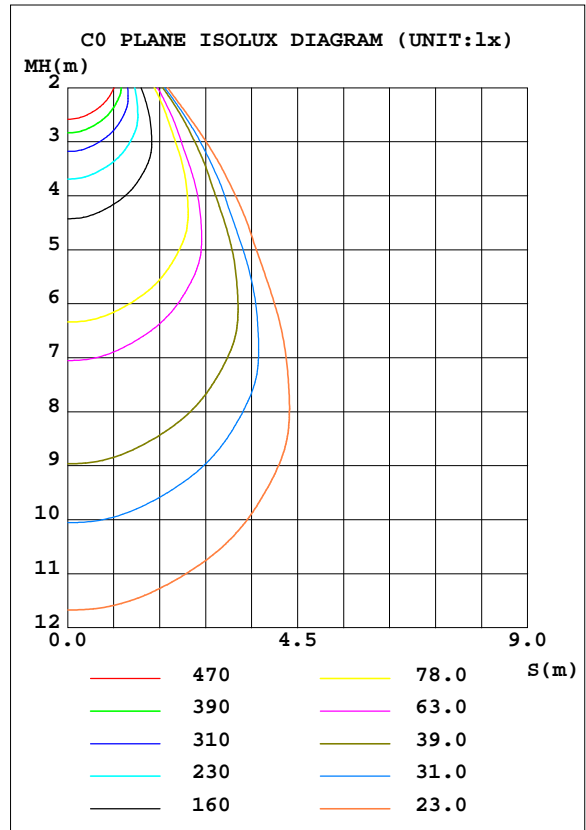


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.41 lm/W			
MODEL		I _{max} (cd)	3135	S/MH(C0/180)	0.97
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.98
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3750.7	η UP, DN(C0-180)	1.3, 48.2
NOMINAL FLUX(lm)	3750.74	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 49.1
LAMPS INSIDE	1	η up(%)	2.7	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	97.3	CIBSE SHR MAX	1.15

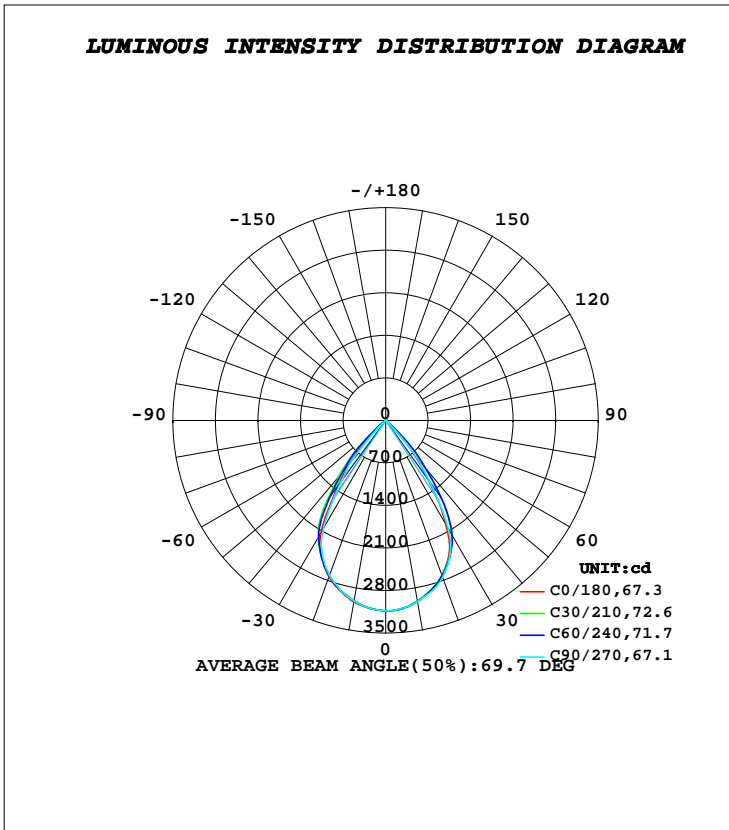

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3014	3022	3026	3030	3033	3015	3010	3008	0- 10	293.6	293.6	7.83,7.83
20	2711	2717	2742	2741	2738	2718	2709	2698	10- 20	813.4	1107	29.5,29.5
30	1985	2184	2071	2239	2134	2216	2052	2165	20- 30	1136	2243	59.8,59.8
40	731.8	1002	806.4	1140	926.0	1142	876.7	1030	30- 40	984.1	3227	86,86
50	39.68	76.76	40.00	150.4	89.93	166.3	74.94	106.3	40- 50	378.7	3606	96.1,96.1
60	6.069	5.550	6.102	6.453	11.53	11.30	11.04	10.39	50- 60	27.18	3633	96.9,96.9
70	2.654	2.401	2.594	2.667	6.557	6.474	6.448	6.212	60- 70	6.012	3639	97,97
80	1.841	1.726	1.823	1.739	5.611	5.546	5.649	5.547	70- 80	4.028	3643	97.1,97.1
90	3.054	3.034	2.918	2.870	6.741	6.810	6.833	6.904	80- 90	4.564	3648	97.3,97.3
100	5.901	5.868	5.654	5.594	8.828	8.962	8.984	9.169	90-100	6.598	3655	97.4,97.4
110	9.983	10.05	9.673	9.668	11.93	12.13	12.10	12.46	100-110	9.617	3664	97.7,97.7
120	15.38	15.38	14.95	14.89	16.26	16.51	16.56	16.92	110-120	13.25	3677	98,98
130	20.99	20.59	20.56	20.14	20.99	20.88	21.35	21.13	120-130	16.47	3694	98.5,98.5
140	24.70	24.14	24.44	23.85	24.11	23.83	24.41	23.91	130-140	17.45	3711	98.9,98.9
150	26.66	26.33	26.52	26.20	25.79	25.62	26.04	25.71	140-150	15.77	3727	99.4,99.4
160	28.67	28.49	28.67	28.47	27.54	27.55	27.75	27.71	150-160	12.48	3740	99.7,99.7
170	30.67	30.67	30.80	30.69	29.76	29.80	29.95	29.96	160-170	8.247	3748	99.9,99.9
180	31.34	31.28	31.54	31.38	31.34	31.28	31.54	31.39	170-180	2.941	3751	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

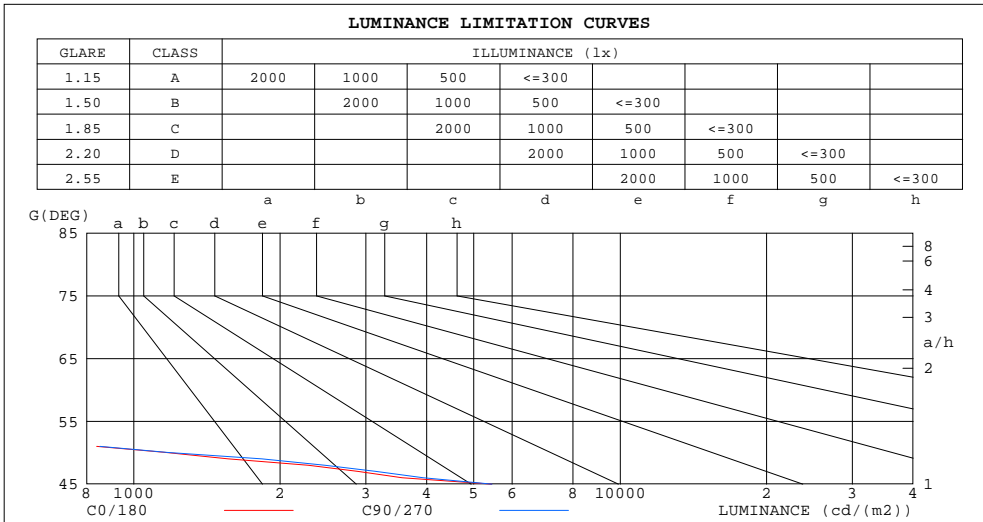

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	481	465
80	200	198
75	130	128
70	146	143
65	173	172
60	229	230
55	393	368
50	1165	1174
45	5439	5452


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρw																
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.09	1.07	1.04	1.07	1.05	1.03	1.02	1.01	.99	.98	.97	.95	.94	.93	.92	.90
2.0	1.01	.97	.93	.99	.95	.92	.95	.92	.90	.92	.89	.87	.89	.87	.85	.83
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.86	.83	.80	.83	.81	.78	.77
4.0	.87	.81	.76	.85	.80	.76	.83	.78	.75	.81	.77	.73	.78	.75	.72	.71
5.0	.81	.74	.70	.79	.74	.69	.77	.72	.68	.75	.71	.68	.73	.70	.67	.65
6.0	.75	.69	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.69	.65	.62	.60
7.0	.70	.63	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.65	.60	.57	.56
8.0	.65	.59	.55	.65	.59	.54	.63	.58	.54	.62	.57	.53	.61	.56	.53	.52
9.0	.61	.55	.51	.61	.55	.50	.59	.54	.50	.58	.53	.50	.57	.53	.49	.48
10.0	.57	.51	.47	.57	.51	.47	.56	.50	.47	.55	.50	.46	.54	.49	.46	.45

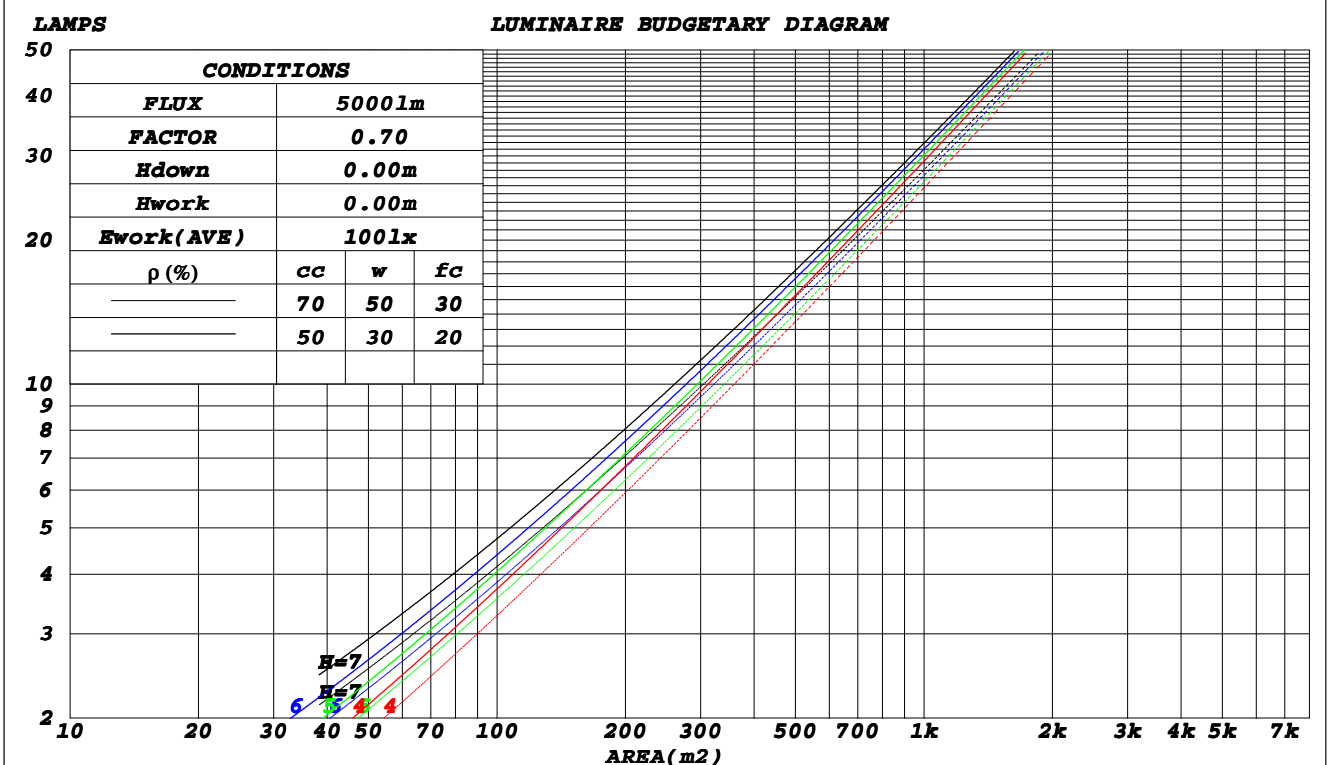

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.190	.108	.034	.182	.104	.033	.168	.096	.031	.155	.089	.029	.143	.083	.027	
2.0	.182	.100	.031	.176	.097	.030	.164	.091	.028	.153	.086	.027	.142	.080	.025	
3.0	.174	.093	.028	.169	.090	.027	.158	.086	.026	.149	.081	.025	.140	.077	.024	
4.0	.167	.087	.025	.162	.085	.025	.152	.081	.024	.144	.077	.023	.136	.074	.022	
5.0	.159	.081	.023	.155	.079	.023	.147	.076	.022	.139	.073	.022	.132	.070	.021	
6.0	.152	.076	.022	.148	.075	.022	.141	.072	.021	.134	.070	.020	.128	.067	.020	
7.0	.145	.072	.020	.142	.071	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	
8.0	.139	.068	.019	.136	.067	.019	.130	.065	.019	.124	.063	.018	.119	.061	.018	
9.0	.133	.064	.018	.130	.063	.018	.125	.062	.018	.120	.060	.017	.115	.058	.017	
10.0	.128	.061	.017	.125	.060	.017	.120	.059	.017	.116	.057	.016	.111	.056	.016	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.211	.211	.211	.181	.181	.181	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.193	.178	.165	.165	.153	.142	.113	.105	.098	.065	.061	.057	.021	.020	.018	
2.0	.179	.154	.132	.153	.132	.114	.105	.091	.080	.061	.053	.047	.019	.017	.015	
3.0	.167	.135	.109	.144	.116	.095	.099	.081	.066	.057	.047	.039	.018	.015	.013	
4.0	.158	.121	.092	.135	.104	.080	.093	.073	.056	.054	.043	.033	.017	.014	.011	
5.0	.150	.109	.079	.129	.095	.069	.089	.066	.049	.051	.039	.029	.017	.013	.010	
6.0	.143	.100	.070	.123	.087	.061	.085	.061	.043	.049	.036	.025	.016	.012	.008	
7.0	.137	.093	.062	.118	.081	.054	.081	.056	.038	.047	.033	.023	.015	.011	.008	
8.0	.131	.087	.056	.113	.075	.049	.078	.053	.035	.046	.031	.021	.015	.010	.007	
9.0	.126	.082	.052	.109	.071	.045	.075	.050	.032	.044	.029	.019	.014	.010	.006	
10.0	.122	.078	.048	.105	.067	.042	.073	.047	.030	.043	.028	.018	.014	.009	.006	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	18.1	17.3	18.3	18.5	17.1	18.1	17.3	18.3	18.5
3H	16.9	17.8	17.2	18.0	18.3	16.9	17.8	17.2	18.1	18.3
4H	16.8	17.6	17.1	17.9	18.2	16.8	17.7	17.1	17.9	18.2
6H	16.7	17.5	17.0	17.8	18.1	16.7	17.5	17.0	17.8	18.1
8H	16.6	17.4	17.0	17.7	18.0	16.6	17.4	17.0	17.7	18.0
12H	16.6	17.3	16.9	17.6	18.0	16.6	17.3	17.0	17.7	18.0
4H 2H	16.8	17.6	17.1	17.9	18.2	16.8	17.7	17.1	17.9	18.2
3H	16.6	17.3	16.9	17.6	18.0	16.6	17.3	17.0	17.7	18.0
4H	16.5	17.1	16.9	17.5	17.9	16.5	17.2	16.9	17.5	17.9
6H	16.4	17.0	16.8	17.3	17.7	16.4	17.0	16.8	17.4	17.8
8H	16.3	16.9	16.8	17.3	17.7	16.3	16.9	16.8	17.3	17.7
12H	16.3	16.8	16.7	17.2	17.6	16.3	16.8	16.7	17.2	17.7
8H 4H	16.3	16.9	16.8	17.3	17.7	16.3	16.9	16.8	17.3	17.7
6H	16.2	16.7	16.7	17.1	17.6	16.2	16.7	16.7	17.1	17.6
8H	16.2	16.5	16.7	17.0	17.5	16.2	16.6	16.7	17.0	17.5
12H	16.1	16.4	16.6	16.9	17.5	16.1	16.5	16.6	17.0	17.5
12H 4H	16.3	16.8	16.7	17.2	17.6	16.3	16.8	16.7	17.2	17.6
6H	16.2	16.5	16.7	17.0	17.5	16.2	16.6	16.7	17.0	17.5
8H	16.1	16.4	16.6	16.9	17.5	16.1	16.5	16.6	16.9	17.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.6 / -19.8					+ 2.6 / -20.0				
1.5H	+ 4.9 / -18.5					+ 4.9 / -18.8				
2.0H	+ 7.9 / -12.0					+ 8.0 / -11.6				

CIE Pub.117, 3751 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 Lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	83	76	72	82	76	72	81	75	71	67
0.80	91	84	80	90	84	80	89	83	79	75
1.00	96	90	86	95	89	86	93	89	85	80
1.25	101	95	91	99	94	91	97	93	90	85
1.50	104	98	95	102	97	94	99	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	104	101	107	103	100	103	100	98	91
3.00	110	107	104	108	105	102	104	102	100	92
4.00	112	109	107	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

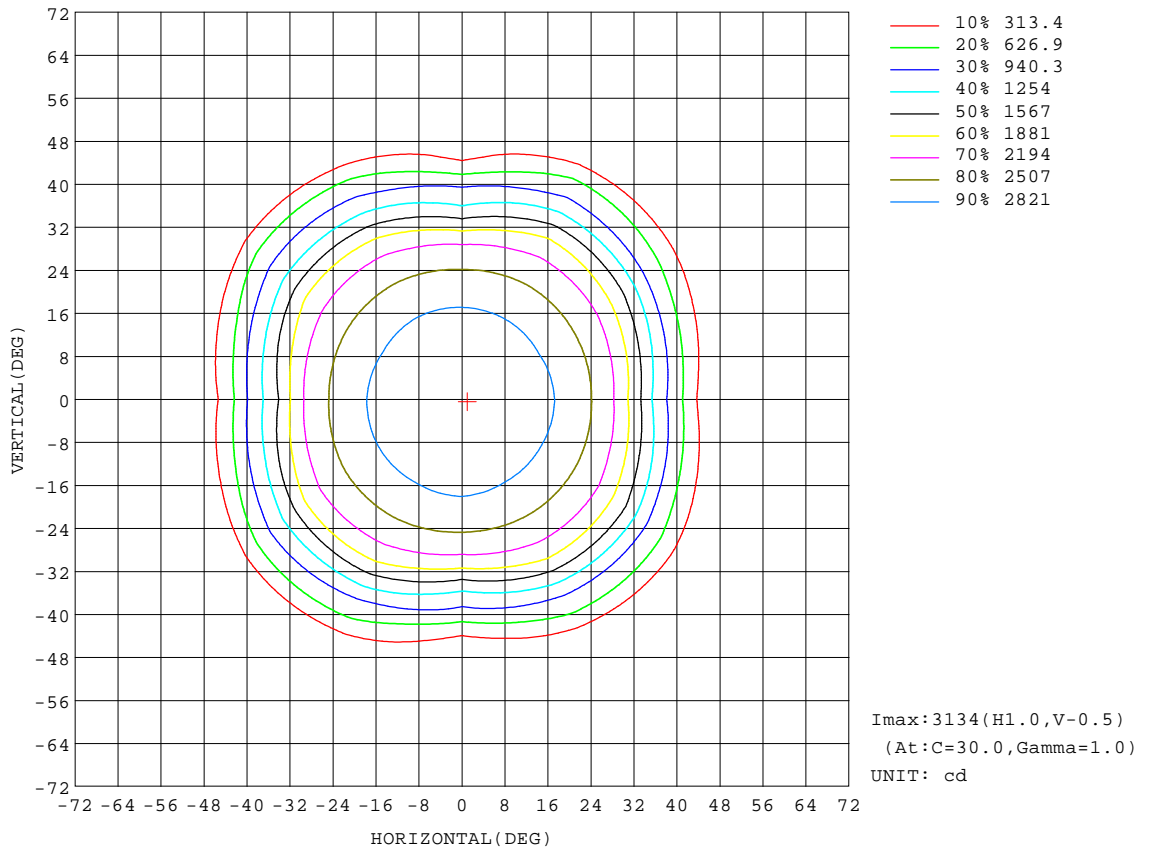


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

Flux out:2696 lm

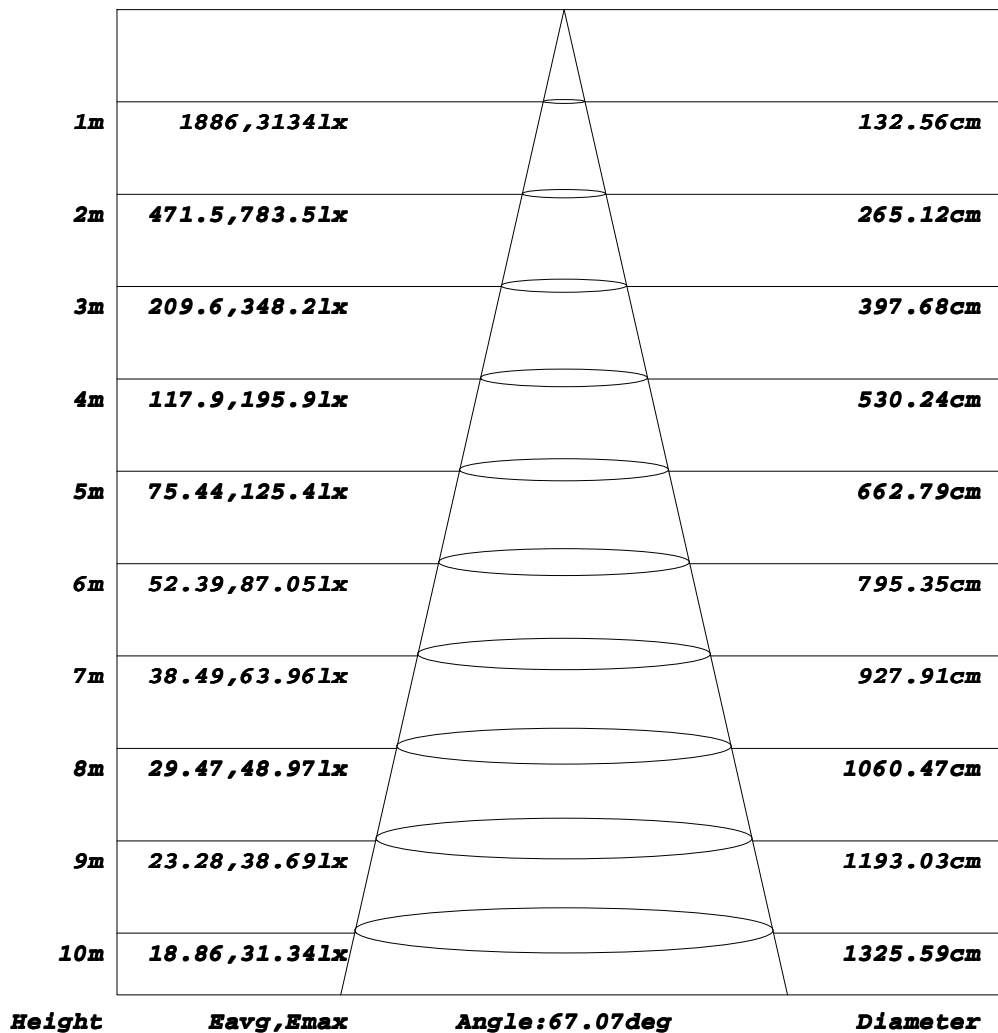


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

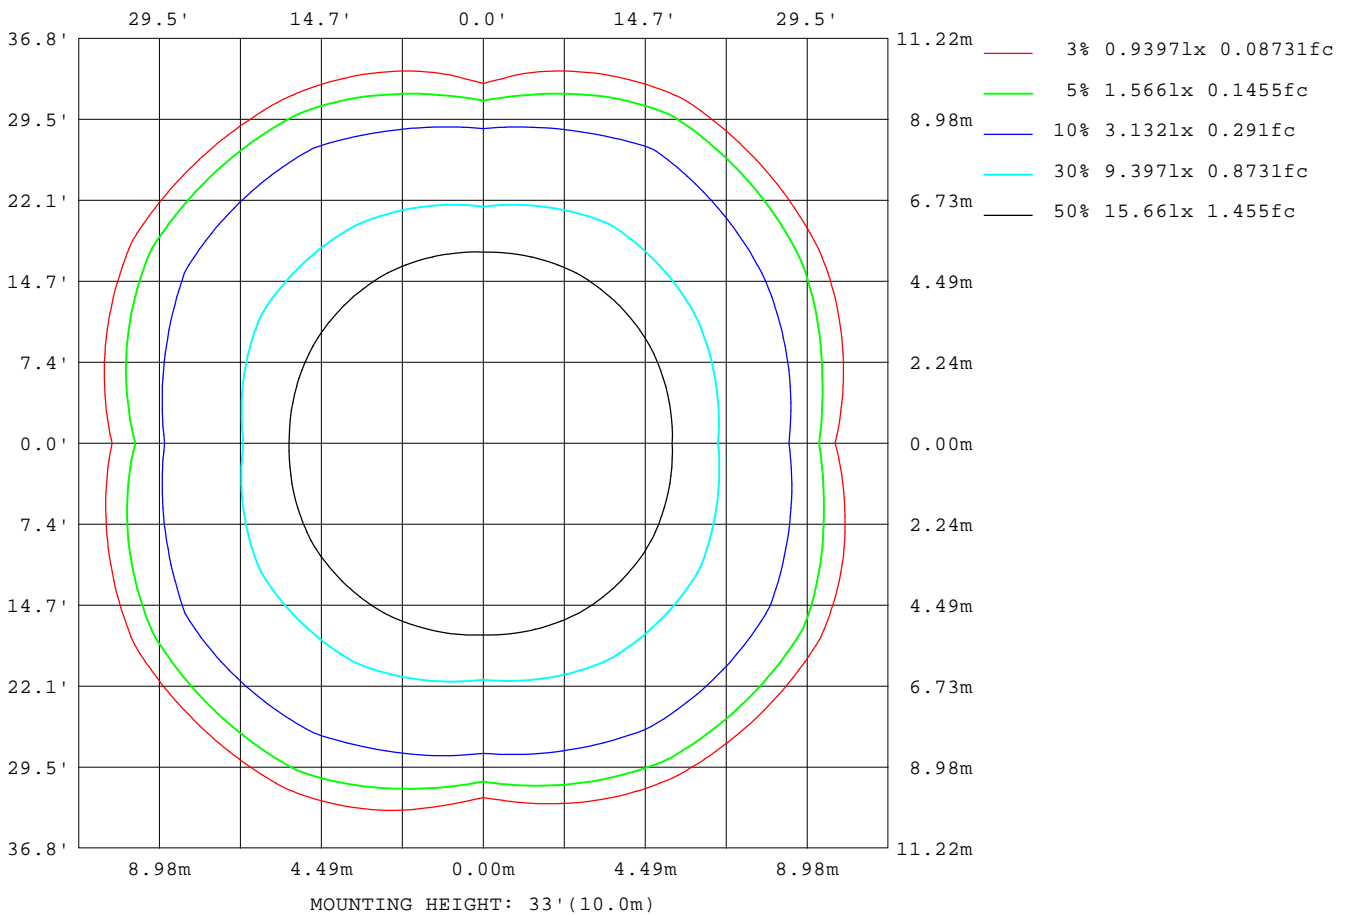

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

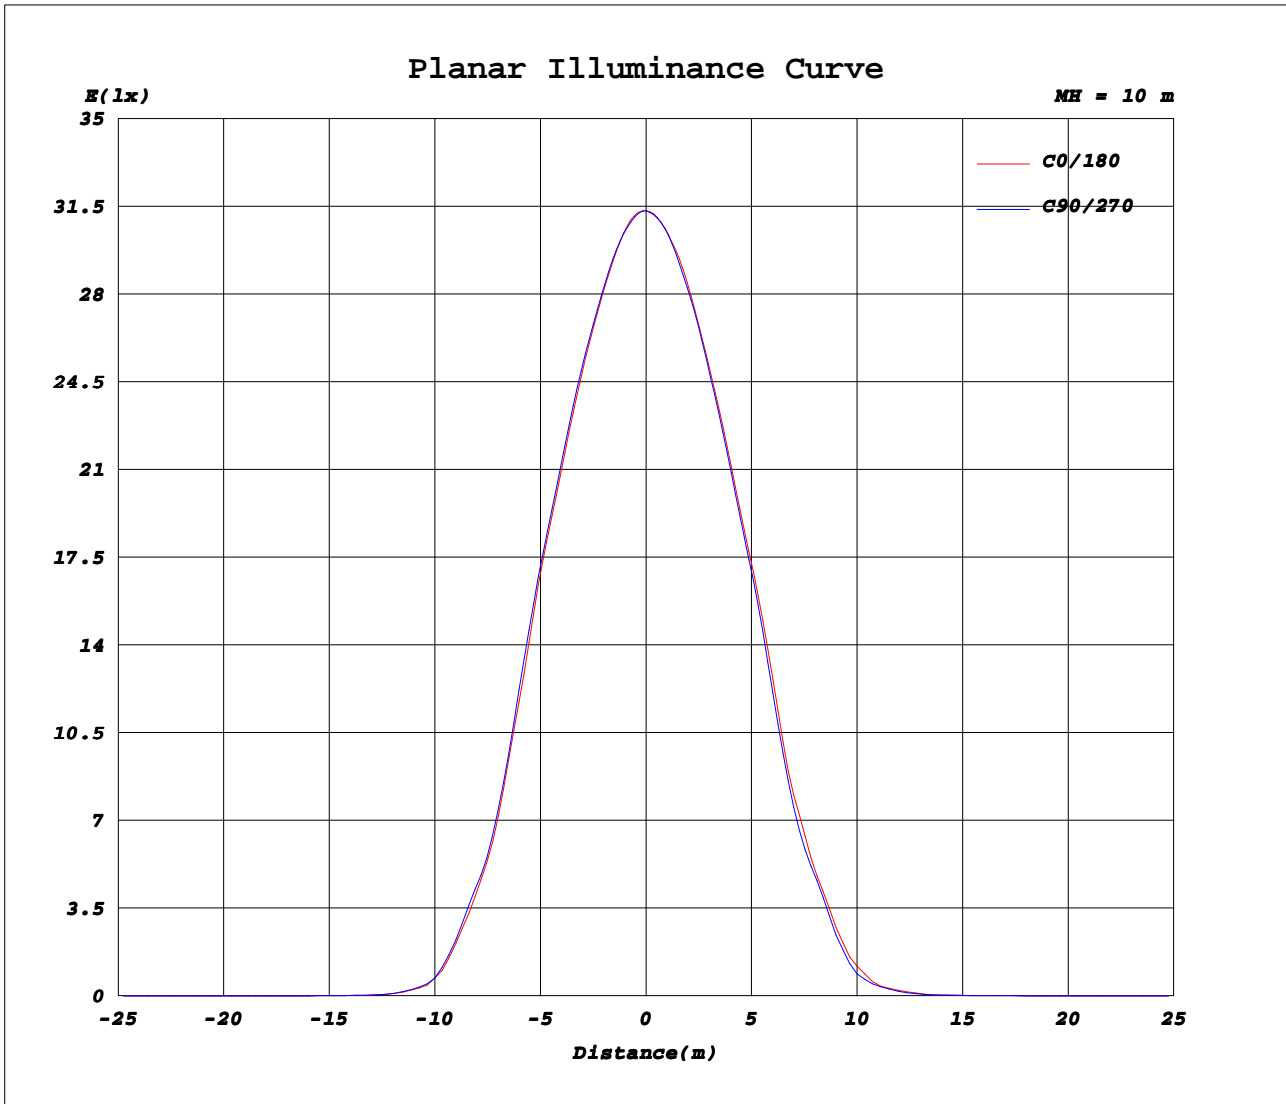

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:224.10V I:0.1270A P:27.700W PF:0.9700 Freq:50.00Hz Lamp Flux:3750.74x1 lm		
NAME: 174-270_5700K	TYPE:LED	
MFR.:	DIM.: 595*595mm	
	SUR.: (115*115) mm*4	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3132	3133	3133	3132	3134	3134	3132	3133	3133	3132	3134	3134							
5	3109	3112	3107	3103	3102	3103	3102	3096	3100	3100	3105	3100							
10	3014	3018	3027	3026	3027	3032	3033	3020	3009	3010	3014	3002							
15	2891	2885	2893	2911	2900	2910	2905	2888	2892	2891	2882	2869							
20	2711	2713	2722	2742	2743	2740	2738	2715	2721	2709	2701	2696							
25	2459	2480	2491	2493	2517	2523	2495	2500	2491	2457	2472	2465							
30	1985	2181	2187	2071	2222	2255	2134	2224	2207	2052	2184	2146							
35	1301	1669	1663	1356	1743	1806	1460	1790	1705	1372	1714	1612							
40	732	1013	991	806	1083	1197	926	1187	1096	877	1096	964							
45	204	531	501	204	615	681	339	706	636	250	640	501							
50	39.7	81.2	72.3	40.0	111	190	89.9	194	139	74.9	136	76.3							
55	12.0	13.8	12.4	11.2	17.3	25.1	20.5	31.7	27.8	20.2	26.3	18.9							
60	6.07	5.63	5.47	6.10	5.97	6.94	11.5	11.4	11.2	11.0	10.8	9.99							
65	3.87	3.58	3.53	3.86	3.77	4.11	8.42	8.16	8.01	8.11	7.78	7.53							
70	2.65	2.42	2.38	2.59	2.55	2.78	6.56	6.55	6.40	6.45	6.32	6.10							
75	1.78	1.79	1.73	1.75	1.89	1.92	5.50	5.63	5.55	5.48	5.52	5.41							
80	1.84	1.73	1.72	1.82	1.75	1.73	5.61	5.56	5.53	5.65	5.56	5.54							
85	2.22	2.19	2.19	2.15	2.14	2.09	6.08	6.10	6.06	6.12	6.11	6.13							
90	3.05	3.02	3.05	2.92	2.89	2.85	6.74	6.83	6.79	6.83	6.88	6.92							
95	4.33	4.25	4.32	4.12	4.07	4.05	7.69	7.80	7.76	7.80	7.90	7.97							
100	5.90	5.83	5.90	5.65	5.59	5.60	8.83	8.99	8.93	8.98	9.11	9.23							
105	7.80	7.77	7.83	7.51	7.48	7.46	10.3	10.4	10.4	10.4	10.6	10.7							
110	9.98	10.0	10.1	9.67	9.70	9.63	11.9	12.1	12.1	12.1	12.4	12.6							
115	12.5	12.6	12.6	12.2	12.2	12.1	14.0	14.2	14.2	14.2	14.5	14.7							
120	15.4	15.4	15.3	15.0	15.0	14.8	16.3	16.5	16.5	16.6	16.8	17.0							
125	18.2	18.2	18.0	17.8	17.8	17.5	18.7	18.8	18.8	19.0	19.0	19.3							
130	21.0	20.7	20.5	20.6	20.3	20.0	21.0	20.9	20.9	21.3	21.0	21.2							
135	23.1	22.8	22.5	22.7	22.4	22.1	22.7	22.5	22.6	23.1	22.6	22.8							
140	24.7	24.2	24.0	24.4	23.9	23.8	24.1	23.8	23.9	24.4	23.9	23.9							
145	25.8	25.4	25.3	25.6	25.1	25.1	25.1	24.8	24.8	25.4	24.9	24.8							
150	26.7	26.3	26.3	26.5	26.2	26.2	25.8	25.6	25.7	26.0	25.7	25.7							
155	27.6	27.4	27.3	27.5	27.3	27.3	26.5	26.4	26.6	26.8	26.6	26.7							
160	28.7	28.5	28.5	28.7	28.5	28.4	27.5	27.4	27.7	27.7	27.6	27.8							
165	29.7	29.6	29.7	29.8	29.7	29.7	28.6	28.6	28.8	28.8	28.8	28.9							
170	30.7	30.5	30.8	30.8	30.6	30.7	29.8	29.8	29.8	30.0	30.0	29.9							
175	31.3	31.2	31.5	31.5	31.3	31.5	30.7	30.6	30.7	30.9	30.8	30.9							
180	31.3	31.2	31.4	31.5	31.3	31.4	31.3	31.2	31.4	31.5	31.3	31.4							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: