


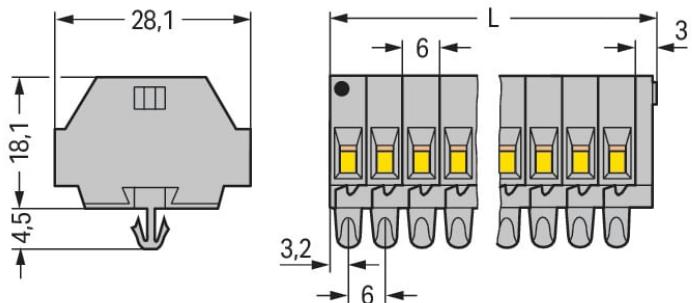

Color: ■ gray

Similar to illustration

 $L = (\text{pole no.} \times \text{pole width}) + 3 \text{ mm}$ • End terminal block

Dimensions in mm

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	500 V
Rated impulse voltage (III/3)	6 kV
Rated current	24 A
Legend (ratings)	(III / 3) ≈ Overvoltage category III / Pollution degree 3

Approvals per

UL 1059

Use group	B	C	D
Rated voltage	300 V	300 V	600 V
Rated current	15 A	15 A	5 A

Approvals per

CSA 22.2 No 158

Use group	B	C	D
Rated voltage	-	300 V	600 V
Rated current	-	10 A	5 A

Connection data

Connection points	24
Total number of potentials	12
Number of levels	1

Connection 1

Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	12
Wiring direction	Side-entry wiring

Physical data

Width	75 mm / 2.953 inches
Height from the surface	18.1 mm / 0.713 inches
Depth	28.1 mm / 1.106 inches
Module width	6 mm / 0.236 inches

Mechanical data

Design	horizontal type
Mounting type	Snap-in foot
Marking level	Side marking

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Fire load	0.525 MJ
Halogen-free	Yes
Weight	28.8 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918629355
Customs tariff number	85369010000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR-NL 6509
CCA DEKRA Certification B.V.	EN 60998	2110272.02
CSA DEKRA Certification B.V.	C22.2	70010891
UR Underwriters Laboratories Inc.	UL 1059	E45172

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity	-	-
WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity	-	-
WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Shipping	-	19-HG1869868-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV
LR Lloyds Register	IEC 60998	LR22173030TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 261-162



Documentation

Additional Information

Technical Section pdf 2240.62 KB



Bid Text

261-162	19.02.2019	xml 3.12 KB
261-162	14.06.2017	doc 25.00 KB



CAD/CAE-Data

CAD data

2D/3D Models 261-162



CAE data

EPLAN Data Portal
261-162WSCAD Universe
261-162

ZUKEN Portal 261-162



1 Compatible Products

1.1 Optional Accessories

1.1.1 DIN-rail

1.1.1.1 Mounting accessories

[Item No.: 210-154](#)

Aluminum carrier rail; 1000 mm long; 18 mm wide; 7 mm high; silver-colored

1.1.2 Ferrule

1.1.2.1 Ferrule

[Item No.: 216-301](#)Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow[Item No.: 216-321](#)Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow[Item No.: 216-151](#)Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated[Item No.: 216-131](#)Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored[Item No.: 216-302](#)Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise[Item No.: 216-322](#)Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise[Item No.: 216-132](#)Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated[Item No.: 216-152](#)Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated[Item No.: 216-201](#)Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white[Item No.: 216-221](#)Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white[Item No.: 216-101](#)Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored[Item No.: 216-121](#)Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored[Item No.: 216-202](#)Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray[Item No.: 216-222](#)Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray[Item No.: 216-102](#)Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored[Item No.: 216-122](#)Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored[Item No.: 216-203](#)Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red[Item No.: 216-223](#)Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red[Item No.: 216-103](#)Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated[Item No.: 216-123](#)Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored[Item No.: 216-204](#)Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black[Item No.: 216-224](#)Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black[Item No.: 216-124](#)Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated[Item No.: 216-104](#)Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored

1.1.2.1 Ferrule



Item No.: 216-205

Ferrule; Sleeve for 2.08 mm² / AWG 14; insulated; electro-tin plated; yellow

Item No.: 216-206

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue

Item No.: 216-106

Ferrule; Sleeve for 2.5 mm² / AWG 14; un-insulated; electro-tin plated; silver-colored

1.1.3 Installation

1.1.3.1 Mounting accessories



Item No.: 209-137

Mounting adapter; can be used as end stop; 6.5 mm wide; gray

Item No.: 209-120

Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

1.1.4 Jumper

1.1.4.1 Jumper



Item No.: 261-402

Jumper; for conductor entry; 2-way; insulated; gray

1.1.5 Marking

1.1.5.1 Marking strip



Item No.: 210-833

Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white

1.1.6 Test and measurement

1.1.6.1 Testing accessories



Item No.: 261-404

Test plug module; with locking latches; modular; for 2-conductor terminal blocks; for 261 Series; gray

Item No.: 249-136

Test plug module; without locking device; modular; for 2-conductor terminal blocks; gray

1.1.7 Tool

1.1.7.1 Operating tool

**Item No.: 210-658**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-657

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

Installation Notes


Conductor termination

**CAGE CLAMP® connection**

Inserting a conductor.

With ferruled conductors, it is necessary to use a terminal block one size larger than the conductor's nominal cross-section.

Commoning



Commoning with comb-style jumper bar.




Testing via test plug modules snapped onto a terminal strip – wired or unwired. As touch contact is made with the CAGE CLAMP® (spring steel) unit, this testing type is limited to maximum 0.5 A.

Distance between locking devices must be approximately 35 ... 40 mm!

Testing after the conductors have been terminated.

Installation




Mounting a terminal strip with snap-in feet into holes.



Mounting a terminal strip with snap-in feet onto aluminum rail.



Terminal strip with snap-in mounting feet
Snapping a mounting foot (209-120).
(Distance between mounting feet: approx.
25 ... 30 mm)



Terminal strip; with snap-in mounting feet;
for DIN-35 rail



Terminal strip with snap-in mounting feet,
for 0.6 ... 1.2 mm plate thickness, 3.5 mm
mounting hole diameter (also for 210-154
Aluminum Rail or with 209-120 Mounting
Foot for DIN-35 rail)

Marking



Marking with self-adhesive marking strips.



Marking by direct printing (upon request).