

TECHNICAL DATA SHEET


DucoFlex Vertical elbow 90° Rigid oval duct



In the standard version, the vertical elbow enables a 90° bend to be made in rigid oval ducting.

Specifications

Item number:	0000-4699
Dimensions (WxHxL) in mm:	163 x 106 x 163
Airtightness class:	D
Inside wall finish:	<ul style="list-style-type: none">• Smooth and flat inside wall• Easy to clean
Specific features:	<ul style="list-style-type: none">• If embedded in a sand-cement finished floor (screed): lay a minimum of 5 cm over the duct• If embedded in concrete: provide connectors between 2 ducts with additional protection (isolated, e.g. tape).• Operating temperature: -25 °C to 60 °C• Minimum installation temperature: -5 °C
Range of application:	Extraction / supply
Maximum flow rate:	150 m ³ /h
Material:	ABS
Colour:	White
Packaging:	Packaged individually

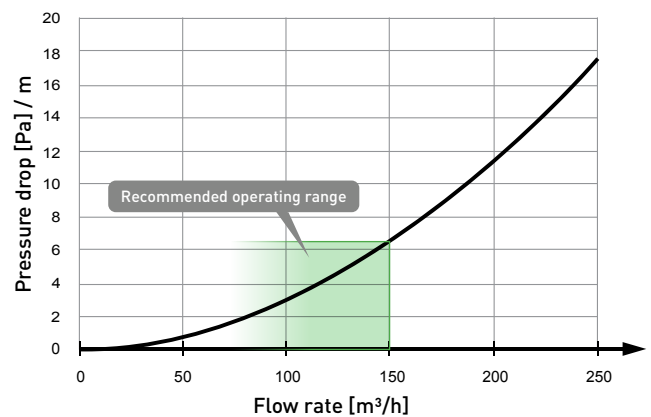

Specifications for supply and extraction

