
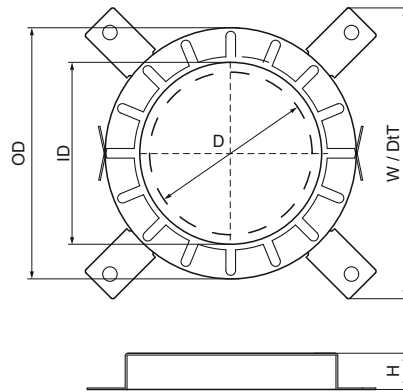


## Walraven Pacifyre® AWM II+ Fire Collar

(U0430)

Innovative fire collar for complex installations of plastic and multi-layer pipes pipes



### Features & benefits

- Zero distance is possible between fire collars
- Built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or flexible walls) and floors with fire protection
- Installation of elbows, pipe couplings or branch pipes into the wall or, directly in, or under the ceiling is possible
- With a fire resistance up to EI 120 U/U
- Installation of telecommunications pipeline or protective piping with up to 2 cables is possible
- The use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- Tested and approved according to EN 1366-3



Product Number	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference Letter	D	ID	OD	H	W	DiT	
Unit description	mm	mm	mm	mm	mm	mm	
2134225225	225	239	328	100	500	510	10
2134250250	250	264	353	100	500	510	10
2134280280	280	289	378	100	500	510	12
2134300300	300	314	403	100	500	510	12
2134315315	315	328	417	100	500	510	12
2134355355	355	370	459	50	453	453	12
2134400400	400	415	504	50	503	503	12
2134032034	32	40	54	26	50	50	2
2134040042	40	48	62	26	58	58	2
2134050052	50	57	71	26	68	68	2
2134063065	63	70	97	26	94	94	4
2134075077	75	83	110	26	106	106	4
2134090092	90	100	138	26	132	132	4
2134110112	110	120	161	26	155	155	4
2134125125	125	135	178	40	172	172	4
2134140140	140	152	206	40	200	200	6
2134160160	160	169	225	40	220	220	6
2134180180	180	184	264	40	264	264	8
2134200200	200	204	684	40	284	284	8