

Start Surface IP66 Ø300mm START SURFACE IP66 1050LM 830 IK10 WHT 0049286



Product features

- LED exterior surface mounted luminaire, 1050lm, 12W power consumption, 88lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant, supplied with anti-theft screws




PRODUCT OVERVIEW

Product name	START SURFACE IP66 1050LM 830 IK10 WHT
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274497
E-number SE	7505130
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492865

PHOTOMETRY

Start Surface IP66 Ø300mm *START SURFACE IP66 1050LM 830 IK10 WHT* 0049286

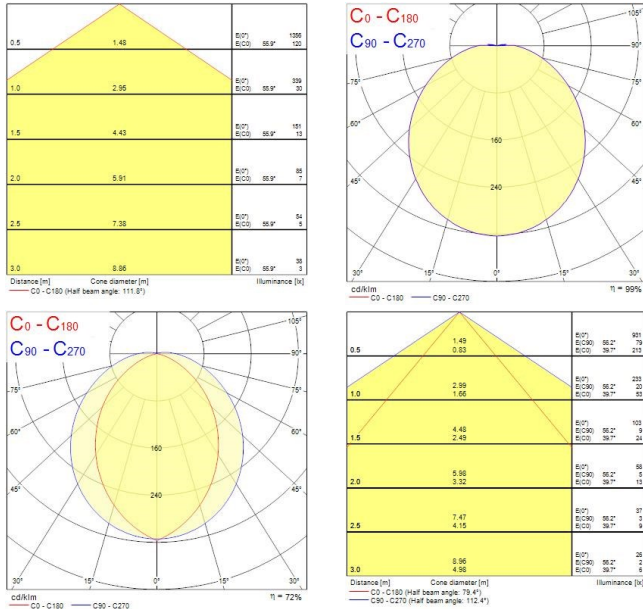

TECHNICAL DRAWINGS

