
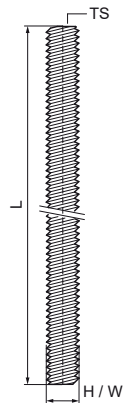


Walraven Threaded Rod

(K5510)

for threaded connections, hangers and ties,



Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1
- M7B: pitch = M7 x 1 mm
- M7F: pitch = M7 x 1.5 mm



Product Number	Norm / Standard	Thread Size	Total Length	Total Height	Total Width
<i>Reference Letter</i>		<i>TS</i>	<i>L</i>	<i>H</i>	<i>W</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>
6303006	DIN 976-1	M6	1,000	6	6
6303007	DIN 976-1	M7x1.0	1,000	7	7
6303008	DIN 976-1	M8	1,000	8	8
6303010	DIN 976-1	M10	1,000	10	10
6303012	DIN 976-1	M12	1,000	12	12
6303014	DIN 976-1	M14	1,000	14	14
6303016	DIN 976-1	M16	1,000	16	16
6303020	DIN 976-1	M20	1,000	20	20
6303206	DIN 976-1	M6	2,000	6	6
6303208	DIN 976-1	M8	2,000	8	8
6303210	DIN 976-1	M10	2,000	10	10
6303212	DIN 976-1	M12	2,000	12	12
6303216	DIN 976-1	M16	2,000	16	16
6303306	DIN 976-1	M6	3,000	6	6
6303308	DIN 976-1	M8	3,000	8	8
6303310	DIN 976-1	M10	3,000	10	10
6303312	DIN 976-1	M12	3,000	12	12
6303316	DIN 976-1	M16	3,000	16	16
6303007F	DIN 976-1	M7x1.5	1,000	7	7