

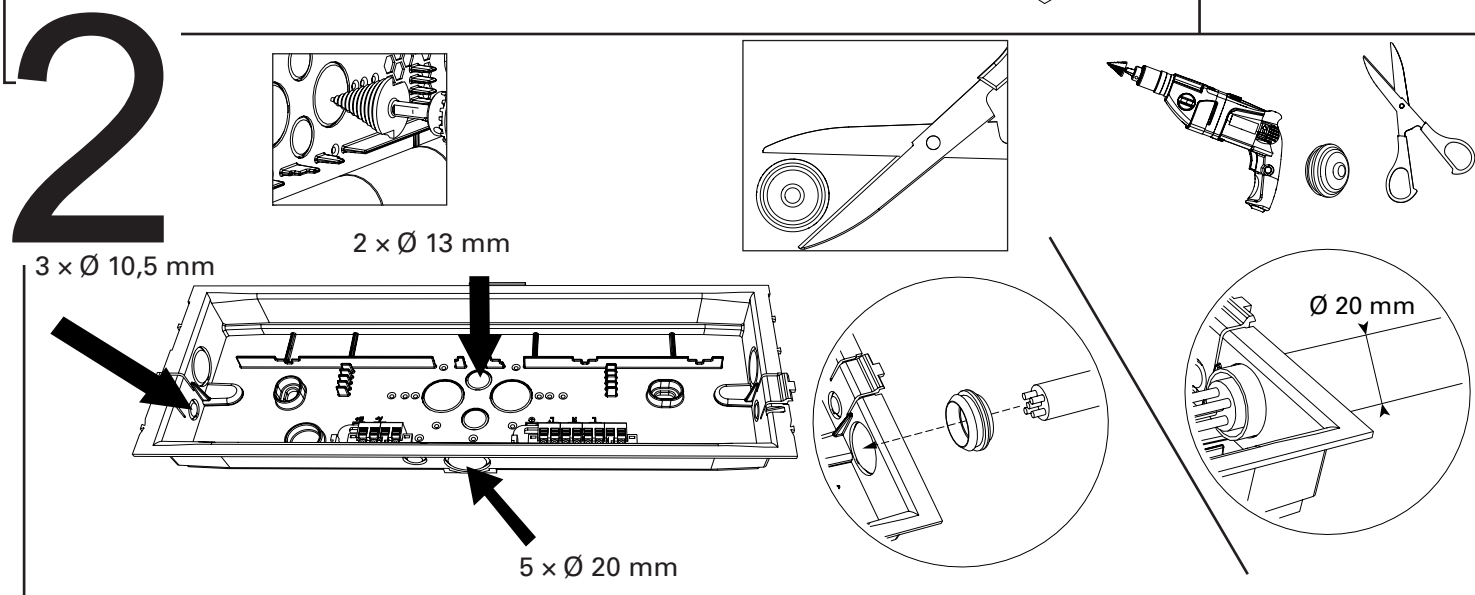
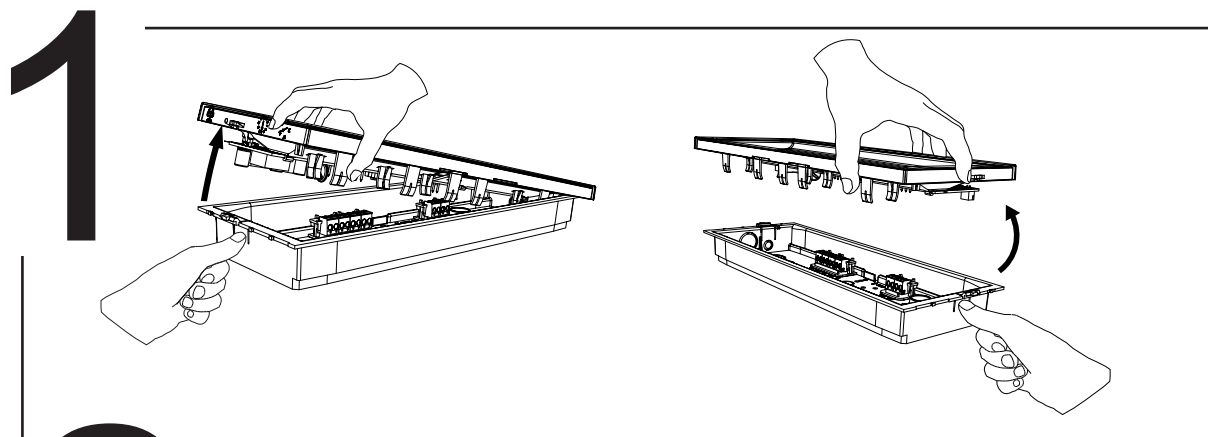
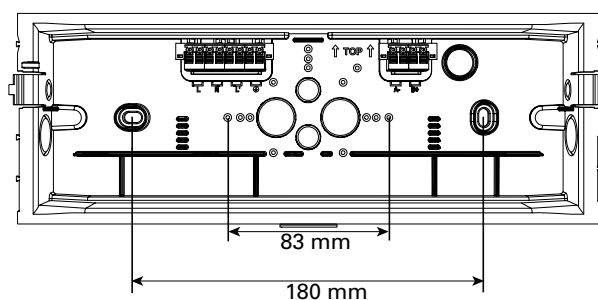
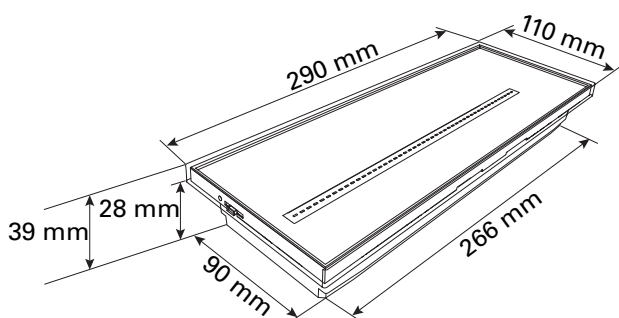



NexiTech LED DOOR Mains / CG-S

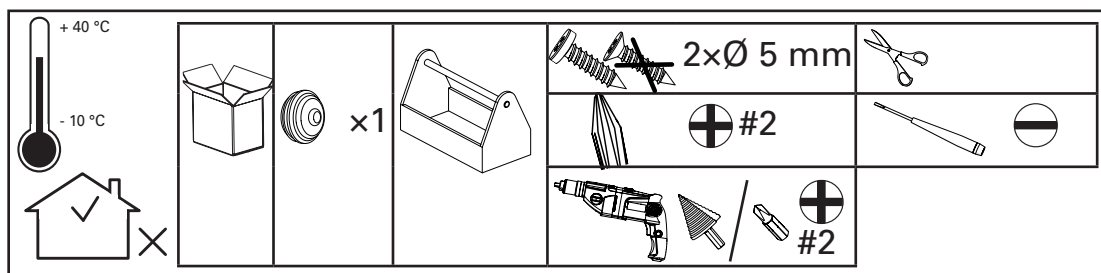


2

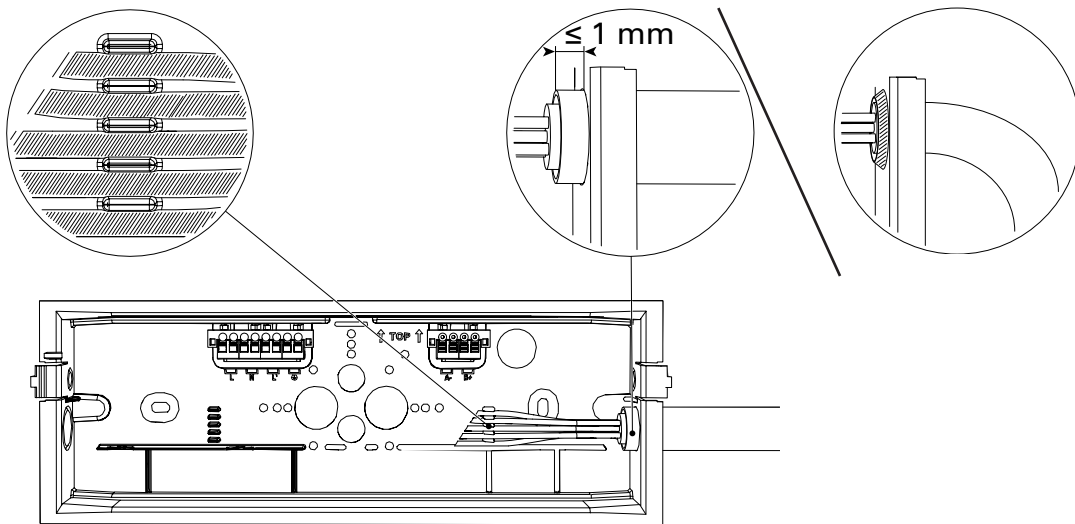


3

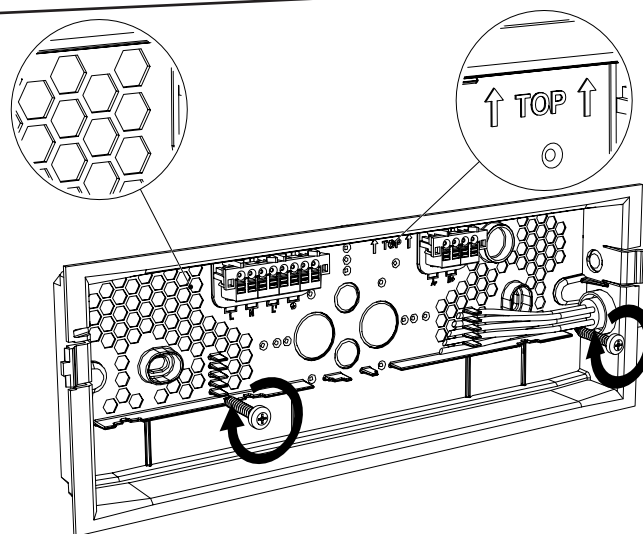

x 2
Ø 5 mm

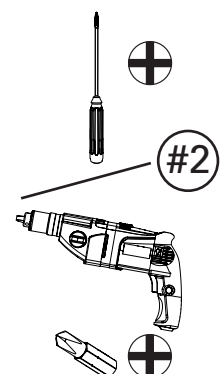

4




Mains

0 V



230 V ~ 50 Hz
220 V DC

N
L

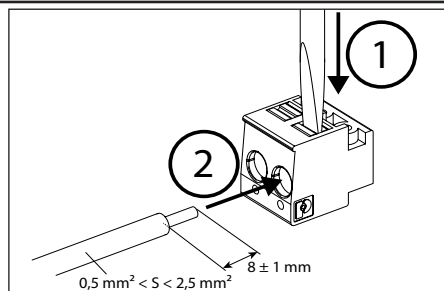


CG-S


230 V ~ 50 Hz
220 V DC

N
L

(ZB-S, CG2000, AT-S+)

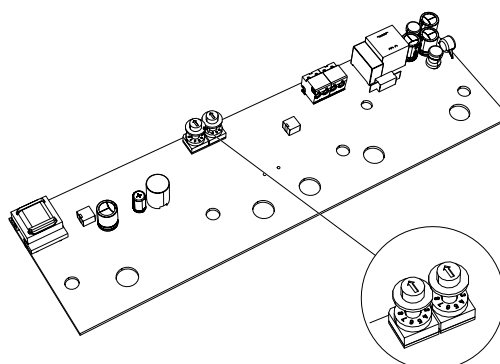


Address program





0 + 0 = No address
0 + 1 = 1
0 + 9 = 9
1 + 0 = 10
1 + 1 = 11
2 + 0 = 20
Max. 20

5


option




+

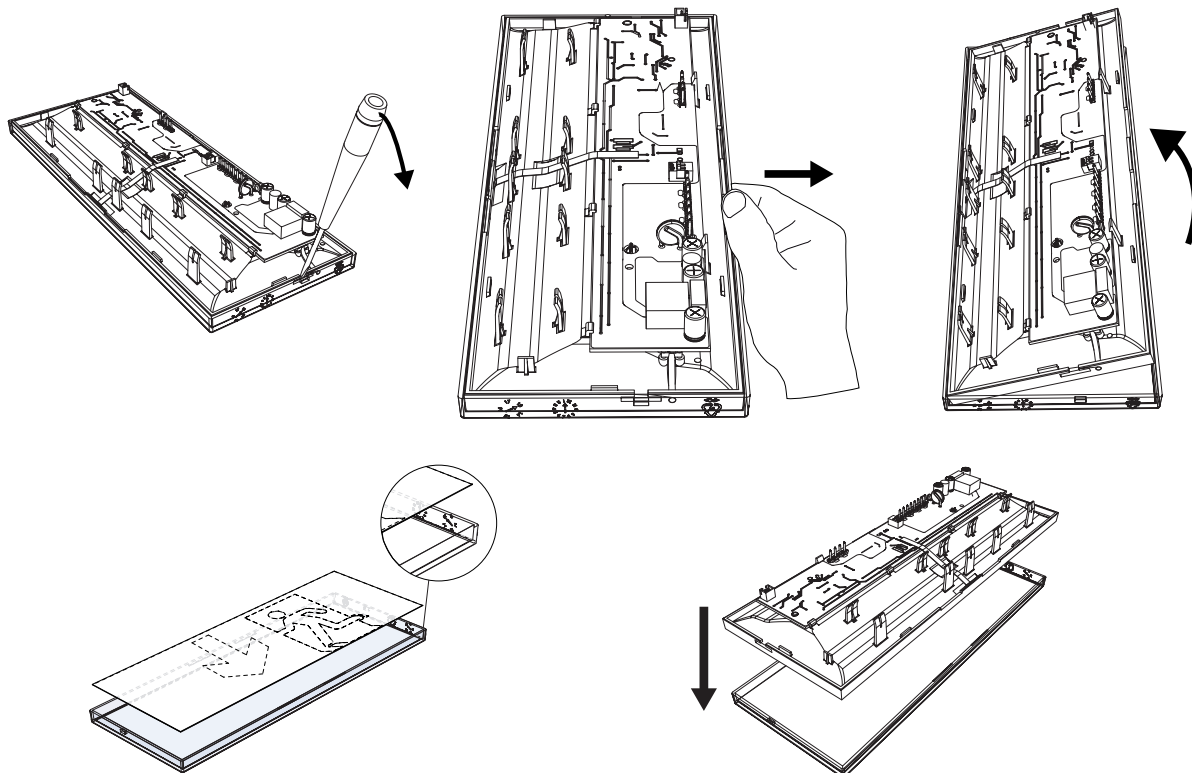


6

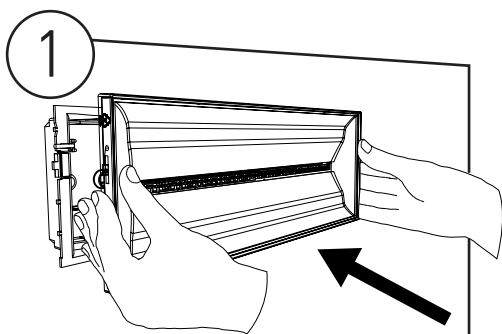


2

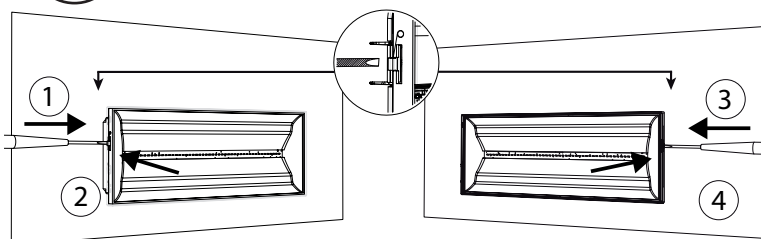


7



+



~ 230 V

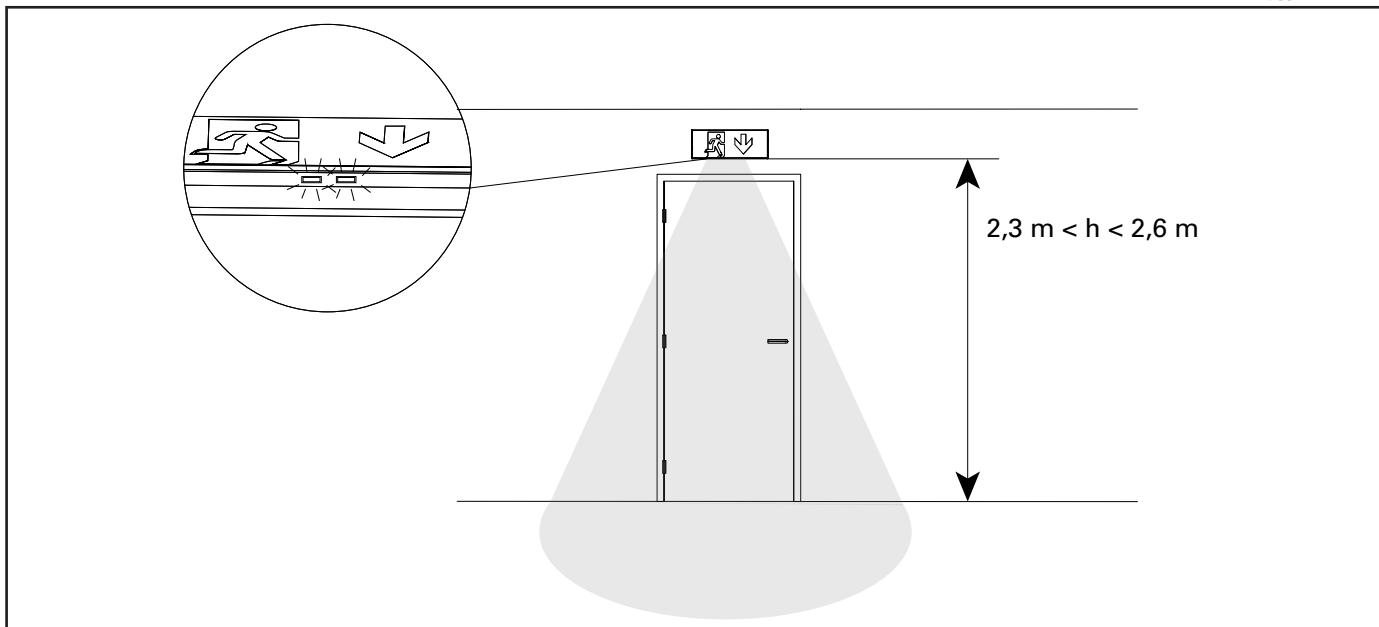

	IP/IK		M.
		Im	W
NEXI-D-230	40/03	250	3.7
NEXI-D-CGS	40/03	250	4.1



NEXI-PICTO-D



NEXI-PICTO-U

