

Concord

Raiden IP66 21KLM 830 Symmetric Wide 2824012



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 21300lm, 157W, 136lm/W, CRI80, Symmetric Wide beam angle 60°, 100000 hrs L90B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.6kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

Product Overview


| | |
|-----------------------------------|--------------------------------------|
| Product name | Raiden IP66 21KLM 830 Symmetric Wide |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| General application | Logistics & Industry |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 21300 |
| Luminaire efficacy (lm/W) | 136 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 60 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 157 |
| Electrical protection | Class I |
| Housing colour | RAL9022 |
| IP rating | IP66 |

Concord

Raiden IP66 21KLM 830 Symmetric Wide 2824012

| | |
|--------------------|---------------|
| IK rating | IK08 |
| Product EAN number | 5025768240128 |
| Warranty | 5 years |
| Dimming method | N/A |

Photometry

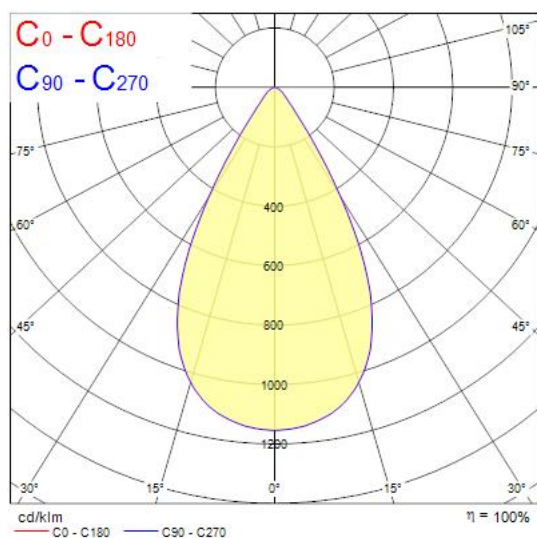

Technical drawings

