

### Features

- H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, light beam angle: 112° Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 34.5W, Fixture lumen output: 2615lm, efficacy: 76lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driverTrack part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm


### Product Overview

|                                   |  |
|-----------------------------------|--|
| <b>Product name</b>               | OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 |
| <b>Technology</b>                 | LED  |
| <b>Cap/Base</b>                   | N/A  |
| <b>Mount</b>                      | Suspended  |
| <b>ETIM Class</b>                 | EC002892   |
| <b>Fixture luminous flux (lm)</b> | 2615   |
| <b>Luminaire efficacy (lm/W)</b>  | 76   |
| <b>LOR (%)</b>                    | 100  |

## OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 9200424


|                                 |                             |
|---------------------------------|-----------------------------|
| Light colour                    | Warm White                  |
| CRI (Ra)                        | 90                          |
| Colour Variation Initial (SDCM) | 3                           |
| Beam Angle (°)                  | 112                         |
| Photobiological Risk Group      | RG0                         |
| Electrical protection           | Class I                     |
| Control gear type               | LED driver constant current |
| Dimmable                        | Yes                         |
| Housing colour                  | RAL9010                     |
| IP rating                       | IP20                        |
| IK rating                       | IK02                        |
| Product EAN number              | 4012289004248               |
| Warranty                        | 5 years                     |
| Dimming method                  | DALI-2                      |
| Colour Code                     | 930                         |

### Photometry

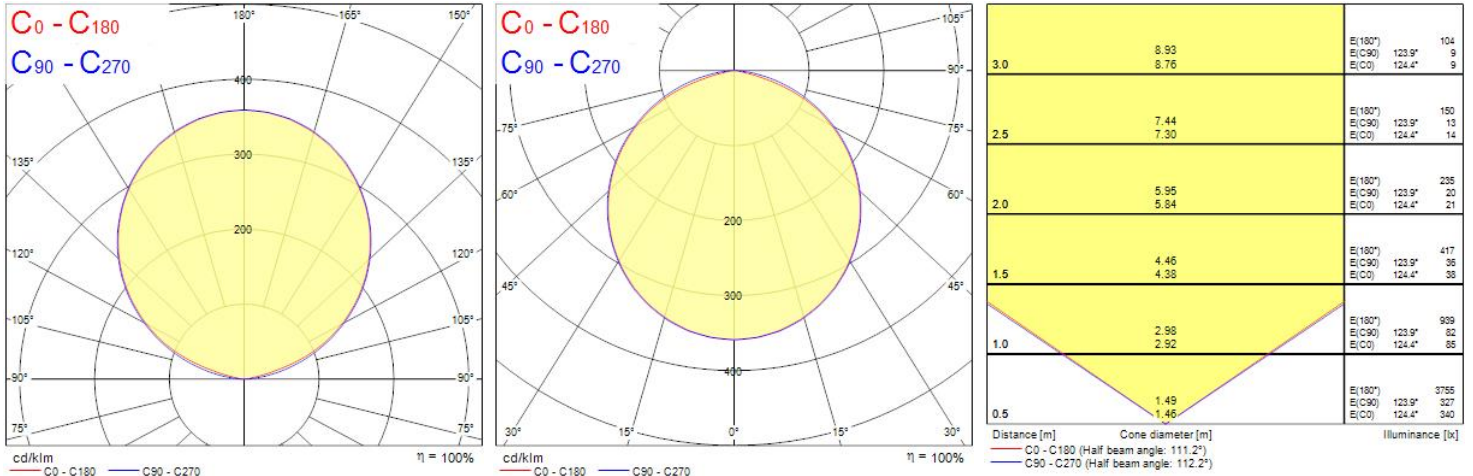

## OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 9200424

### Technical drawings

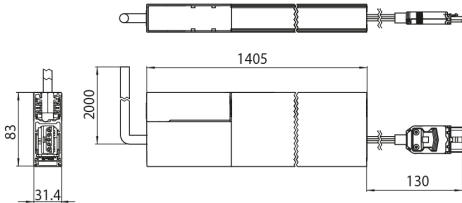

### Data table

#### GENERAL DATA

|                                  |   |
|----------------------------------|---|
| Product name                     | OT H-TRK READY STARTER 930 DALI WH<br>H32S1405/W5-O-2 |
| Technology                       | LED   |
| Cap/Base                         | N/A   |
| Mount                            | Suspended   |
| Operating temperature range (°C) | 1°C...+25°C   |
| ETIM Class                       | EC002892  |
| Warranty                         | 5 years   |

#### OPTICAL DATA

|                                 |            |
|---------------------------------|------------|
| Fixture luminous flux (lm)      | 2615       |
| Luminaire efficacy (lm/W)       | 76         |
| LOR (%)                         | 100        |
| Colour Code                     | 930        |
| Light colour                    | Warm White |
| CRI (Ra)                        | 90         |
| Colour Variation Initial (SDCM) | 3          |
| Beam Angle (°)                  | 112        |
| Distribution type               | Diffuse    |

## OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 9200424

|                            |     |
|----------------------------|-----|
| Photobiological Risk Group | RG0 |
|----------------------------|-----|

### ELECTRICAL DATA

|  |                             |
|--|-----------------------------|
| Primary Supply/Product voltage - min (V)                     | 220.0                       |
| Primary Supply/Product voltage - max (V)                     | 240.0                       |
| Lamp power factor  | 0.95                        |
| Electrical protection  | Class I                     |
| Control gear required  | No                          |
| Control gear type  | LED driver constant current |
| Dimmable   | Yes                         |
| Dimming method   | DALI-2                      |
| Inrush Current (A)   | 10                          |
| Inrush Duration ( $\mu$ s)                                   | 200                         |
| Energy Efficiency Class (A->G) of contained light source     | F                           |
| Max. products per 10A C Breaker                              | 31                          |
| Max. products per 16A C Breaker                              | 51                          |
| Max. products per 16A B Breaker                              | 30                          |
| Connectable conductor cross section - Min (mm <sup>2</sup> ) | 7.5                         |
| Connectable conductor cross section - Max (mm <sup>2</sup> ) | 7.5                         |

### PHYSICAL DATA

|                             |         |
|-----------------------------|---------|
| Housing colour              | RAL9010 |
| IP rating                   | IP20    |
| IK rating                   | IK02    |
| Nominal Product Length (mm) | 1405    |
| Nominal Product Width (mm)  | 31.4    |
| Nominal Product Height (mm) | 83      |
| Weight (kg)                 | 4.0     |

### PACKAGING

|                       |        |
|-----------------------|--------|
| Single packaging type | Carton |
|-----------------------|--------|

## OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 9200424

|                                       |               |
|---------------------------------------|---------------|
| Product EAN number                    | 4012289004248 |
| Packaging single length / height (cm) | 10.0          |
| Packaging single width (cm)           | 10.0          |
| Packaging single depth (cm)           | 150.0         |
| Units per outer package               | 1             |
| Packaging outer length / height (cm)  | 10.0          |
| Packaging outer width (cm)            | 10.0          |
| Packaging outer depth (cm)            | 150.0         |

### SAFETY DATA

|                                     |      |
|-------------------------------------|------|
| Glow Wire Test (°C)                 | 650  |
| Optimal operating condition (°C)    | 1-25 |
| Special purpose lamp                | No   |
| Dry applications use only           | No   |
| Suitable for household illumination | No   |