

### Features

- H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, light beam angle: 112° Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 34.5W, Fixture lumen output: 2615lm, efficacy: 76lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driverTrack part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm


### Product Overview

<b>Product name</b>	OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2
<b>Technology</b>	LED
<b>Mount</b>	Suspended
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	2615
<b>Luminous flux (lm)</b>	2615
<b>Luminaire efficacy (lm/W)</b>	76
<b>LOR (%)</b>	100

## OT H-TRK READY STARTER 930 DALI WH H32S1405/W5-O-2 9200424

Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Photobiological Risk Group	RG0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9010
IP rating	IP20
IK rating	IK02
Product EAN number	4012289004248
Warranty	5 years
Dimming method	DALI-2
Colour Code	930

### Photometry

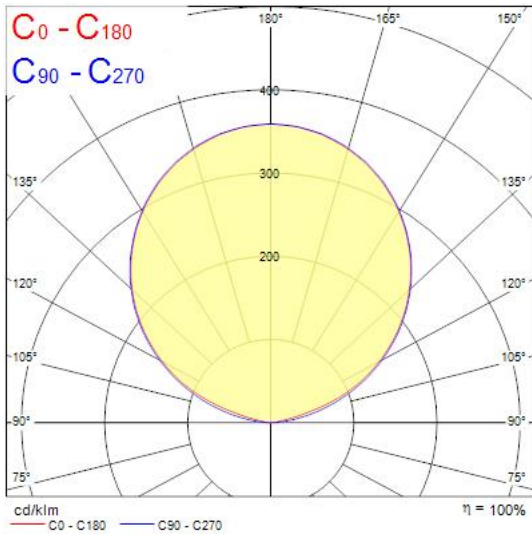

### Technical drawings

