

### Features

- H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector Opal diffuser, diffuse light beam angle: 112°. Textured white finishing colour. Light color temperature: 4000K, natural white, Total system power: 34.5W. Fixture lumen output: 2600lm, efficacy: 75lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driver. Track part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L. 1405mmx31.4mmx83mm


### Product Overview

<b>Product name</b>	OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Mount</b>	Suspended
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	2600
<b>Luminaire efficacy (lm/W)</b>	75
<b>LOR (%)</b>	100

## OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2 9200427


Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Photobiological Risk Group	RG0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	4012289004279
Warranty	5 years
Dimming method	DALI-2
Colour Code	940

### Photometry

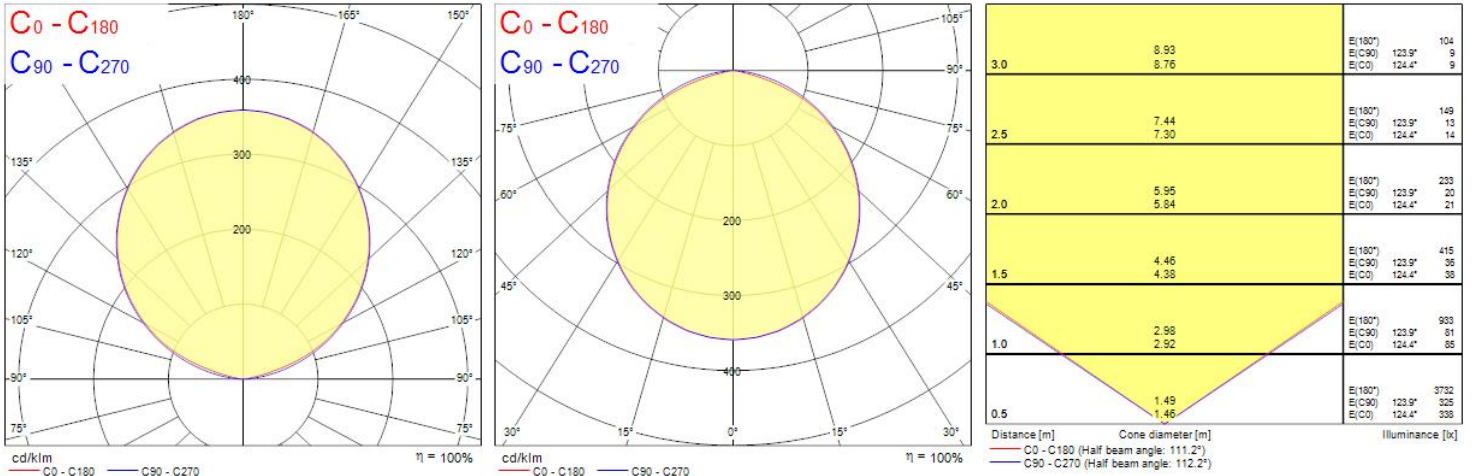

## OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2 9200427

### Technical drawings

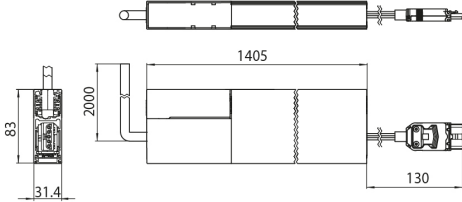

### Data table

#### GENERAL DATA

Product name	OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2
Technology	LED
Cap/Base	N/A
Mount	Suspended
Operating temperature range (°C)	1°C...+25°C
ETIM Class	EC002892
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	2600
Luminaire efficacy (lm/W)	75
LOR (%)	100
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Distribution type	Diffuse

## OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2 9200427

Photobiological Risk Group	RG0
----------------------------	-----

### ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Inrush Current (A)	10
Inrush Duration ( $\mu$ s)	200
Energy Efficiency Class (A->G) of contained light source	F
Max. products per 10A C Breaker	31
Max. products per 16A C Breaker	51
Max. products per 16A B Breaker	30
Connectable conductor cross section - Min (mm <sup>2</sup> )	7.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	7.5

### PHYSICAL DATA

Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1405
Nominal Product Width (mm)	31.4
Nominal Product Height (mm)	83
Weight (kg)	4.0

### PACKAGING

Single packaging type	Carton
-----------------------	--------

## OT H-TRK READY STARTER 940 DALI BL H32S1405/B6-O-2 9200427

Product EAN number	4012289004279
Packaging single length / height (cm)	10.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	150.0
Units per outer package	1
Packaging outer length / height (cm)	10.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	150.0

### SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No