



Features

- H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, diffuse light beam angle: 112°. Textured white finishing colour. Light color temperature: 4000K, natural white, Total system power: 34.5W. Fixture lumen output: 2850lm, efficacy: 83lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driver. Track part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm



Product Overview

Product name	OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2
Technology	LED
Cap/Base	N/A
Mount	Suspended
ETIM Class	EC002892
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	83
LOR (%)	100

OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2 9200428

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Photobiological Risk Group	RG0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9010
IP rating	IP20
IK rating	IK02
Product EAN number	4012289004286
Warranty	5 years
Dimming method	DALI-2
Colour Code	940

Photometry

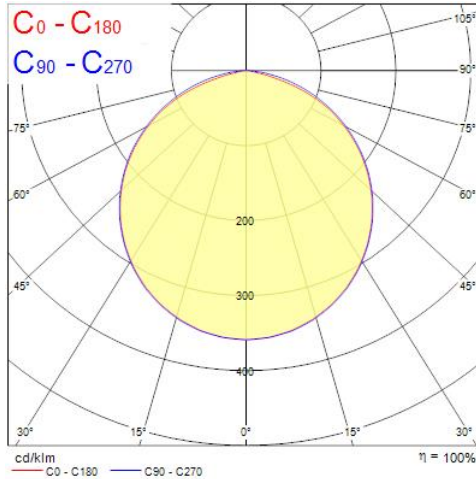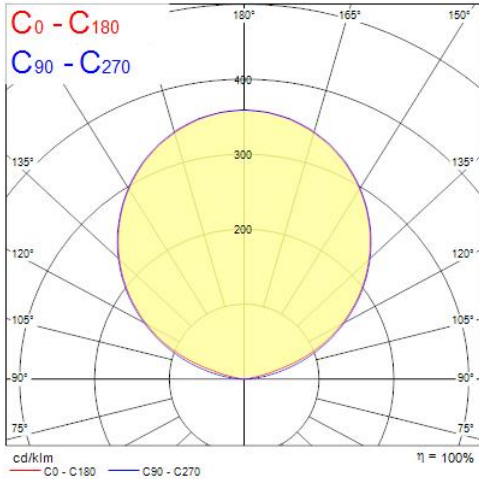


Distance [m]	Cone diameter [m]	E(180°)	E(C90)	E(C0)	Illuminance [lx]
3.0	8.93	114	10	10	
		123.9°	10		
		124.4°	10		
2.5	7.44	164	14	15	
		123.9°	14		
		124.4°	15		
2.0	5.95	256	22	23	
		123.9°	22		
		124.4°	23		
1.5	4.46	455	40	41	
		123.9°	40		
		124.4°	41		
1.0	2.98	1023	89	93	
		123.9°	89		
		124.4°	93		
0.5	1.49	4093	356	371	
		123.9°	356		
		124.4°	371		

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 111.2°)
— C90 - C270 (Half beam angle: 112.2°)

OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2 9200428

Technical drawings

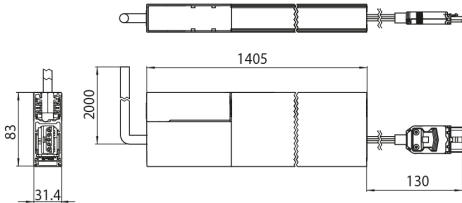

Data table

GENERAL DATA

Product name	OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2
Technology	LED
Cap/Base	N/A
Mount	Suspended
Operating temperature range (°C)	1°C...+25°C
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Distribution type	Diffuse

OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2 9200428

Photobiological Risk Group	RG0
----------------------------	-----

ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Inrush Current (A)	10
Inrush Duration (μ s)	200
Energy Efficiency Class (A->G) of contained light source	F
Max. products per 10A C Breaker	31
Max. products per 16A C Breaker	51
Max. products per 16A B Breaker	30
Connectable conductor cross section - Min (mm ²)	7.5
Connectable conductor cross section - Max (mm ²)	7.5

PHYSICAL DATA

Housing colour	RAL9010
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1405
Nominal Product Width (mm)	31.4
Nominal Product Height (mm)	83
Weight (kg)	4.0

PACKAGING

Single packaging type	Carton
-----------------------	--------

OT H-TRK READY STARTER 940 DALI WH H32S1405/W6-O-2 9200428

Product EAN number	4012289004286
Packaging single length / height (cm)	10.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	150.0
Units per outer package	1
Packaging outer length / height (cm)	10.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	150.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No