

Product Environmental Profile

VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass




General information

Reference product	VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass - VZ419E-20BP09
Description of the product	The VZ419E is a small linear three-way with bypass zone valve used for the fine control of hot or chilled water in terminal units. It is designed to be used with the MZ200 family of electro-mechanical actuators, these actuators are available in 3 point floating and modulating control. The valve utilise a double O-ring design on the plug to ensure a leak tight seal on both valve ports, this ensures no loss of energy leakage through the valve. The 5.5mm stroke length coupled with the high resolution MZ2 electro-mechanical actuator provides good hydronic control. The valve is male threaded valves with flat face seals, a range of connection sets are available to mate onto pipe. Size DN 20, G3/4A connection, 4 Kvs. Pressure class PN16, stroke 5.5 mm, Normally closed (A-Ab). External thread to ISO 228/1 (flat face seal).
Description of the range	Single product
Functional unit	For VZ419E linear three-way zone valve, to provide precise hydronic control by regulating the flow of hot or chilled water in terminal units, ensuring energy-efficient performance through a double O-ring plug seal that prevents internal leakage, for 20 years.
Specifications are:	<ul style="list-style-type: none"> - Max fluid: speed 3 m/s - Max Glycol concentration: 50% - Pressure Class: PN16 - Media Temperature: 2°C to 95°C - Connection: External thread to ISO 228/1 (flat face seal) - Flow Characteristic: Equal percentage (EQM) on direct (A-AB) way Linear on by-pass (B-AB) way

Constituent materials

Reference product mass 540 g including the product, its packaging, additional elements and accessories

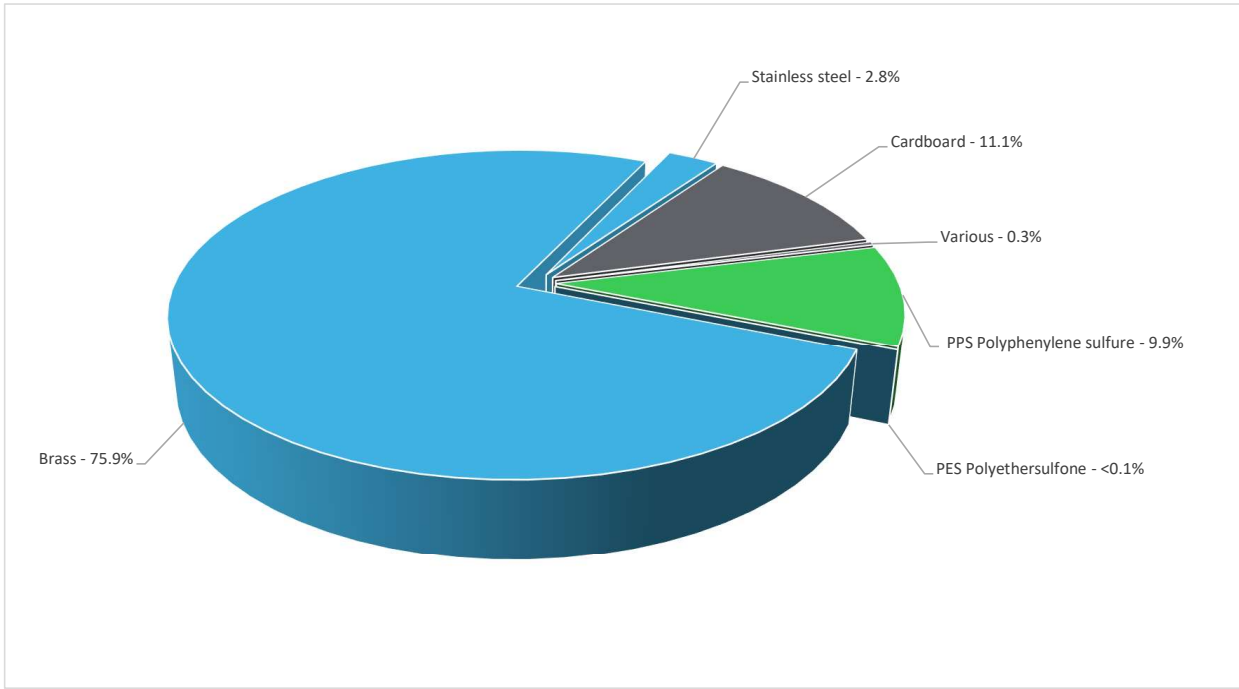

Plastics	9.9%
Metals	78.7%
Others	11.4%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website <https://www.se.com>

Additional environmental information

End Of Life	Recyclability potential:	87%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	------------	--

Environmental impacts

Reference service life time	20 years		
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study		
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption		
Installation elements	The product installation requires no energy. The disposal of packaging materials is also accounted during the installation phase, including transport to disposal.		
Use scenario	Products are fully mechanical built without providing any electrical functions by consuming electricity, for 20 years.		
Time representativeness	The collected data are representative of the year 2025		
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representaive of the actual type of technologies used to make the product.		
Geographical representativeness	Final assembly site	Use phase	End-of-life
	Italy, Europe	Europe, Oceania	Europe, Oceania
	[A1 - A3]	[A5]	[C1 - C4]
Energy model used	Electricity Mix; Low voltage; 2020; Italy, IT	No energy used	Electricity Mix; Low voltage; 2020; Europe, EU-27 Electricity Mix; Low voltage; 2020; Australia, AU Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

Mandatory Indicators		VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass - VZ419E-20BP09							
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to climate change	kg CO2 eq	6.50E+00	4.87E+00	1.38E-01	6.42E-02	0*	1.43E+00	-2.07E+00	
Contribution to climate change-fossil	kg CO2 eq	6.42E+00	4.79E+00	1.38E-01	6.11E-02	0*	1.43E+00	-2.06E+00	
Contribution to climate change-biogenic	kg CO2 eq	8.51E-02	8.21E-02	0*	3.04E-03	0*	0*	-1.22E-02	
Contribution to climate change-land use and land use change	kg CO2 eq	3.99E-07	3.99E-07	0*	0*	0*	0*	0.00E+00	
Contribution to ozone depletion	kg CFC-11 eq	5.62E-07	5.61E-07	2.10E-10	8.30E-10	0*	2.98E-10	-6.22E-07	
Contribution to acidification	mol H+ eq	8.65E-02	8.09E-02	9.17E-04	1.88E-04	0*	4.51E-03	-1.12E-02	
Contribution to eutrophication, freshwater	kg P eq	4.61E-04	4.58E-04	5.15E-08	1.47E-06	0*	1.13E-06	-7.12E-06	
Contribution to eutrophication, marine	kg N eq	9.05E-03	7.57E-03	4.33E-04	8.16E-05	0*	9.73E-04	-1.20E-03	
Contribution to eutrophication, terrestrial	mol N eq	9.93E-02	8.33E-02	4.75E-03	5.67E-04	0*	1.07E-02	-1.31E-02	
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.04E-02	2.55E-02	1.20E-03	1.30E-04	0*	3.56E-03	-4.94E-03	
Contribution to resource use, minerals and metals	kg Sb eq	5.35E-04	5.35E-04	0*	0*	0*	0*	-2.88E-04	
Contribution to resource use, fossils	MJ	1.67E+02	7.55E+01	1.91E+00	6.35E-01	0*	8.86E+01	-2.81E+01	
Contribution to water use	m3 eq	2.38E+00	1.91E+00	5.21E-04	4.95E-03	0*	4.67E-01	-8.92E-01	

Inventory flows Indicators		VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass - VZ419E-20BP09						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	1.43E+00	1.34E+00	2.56E-03	8.32E-02	0*	3.04E-03	1.73E-02
Contribution to renewable primary energy used as raw material	MJ	1.22E+00	1.22E+00	0*	0*	0*	0*	-8.86E-01
Contribution to total renewable primary energy	MJ	2.65E+00	2.56E+00	2.56E-03	8.32E-02	0*	3.04E-03	-8.68E-01
Contribution to non renewable primary energy used as energy	MJ	1.65E+02	7.37E+01	1.91E+00	6.35E-01	0*	8.86E+01	-2.81E+01
Contribution to non renewable primary energy used as raw material	MJ	1.83E+00	1.83E+00	0*	0*	0*	0*	0.00E+00
Contribution to total non renewable primary energy	MJ	1.67E+02	7.55E+01	1.91E+00	6.35E-01	0*	8.86E+01	-2.81E+01
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m³	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to hazardous waste disposed	kg	3.98E+01	3.98E+01	0*	0*	0*	0*	-2.09E+01
Contribution to non hazardous waste disposed	kg	2.27E+00	2.17E+00	4.82E-03	2.74E-02	0*	7.26E-02	-7.30E-01
Contribution to radioactive waste disposed	kg	3.81E-04	3.69E-04	3.43E-06	3.39E-06	0*	4.87E-06	-3.47E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	4.79E-01	6.25E-02	0*	0*	0*	4.17E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	7.36E-03	6.28E-04	0*	2.62E-03	0*	4.12E-03	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 1.68E-02

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass - VZ419E-20BP09							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-fossil	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-biogenic	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to acidification	mol H+ eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication, freshwater	kg P eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication marine	kg N eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to eutrophication, terrestrial	mol N eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to resource use, minerals and metals	kg Sb eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to resource use, fossils	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to water use	m3 eq	0*	0*	0*	0*	0*	0*	0*	0*

Inventory flows Indicators		VZ419E Linear Zone Valve, DN20, 3-Way Bypass, G External, Brass - VZ419E-20BP09								
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to total use of non-renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to net use of freshwater	m³	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to non hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to radioactive waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.5-6, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2508014_V1	Drafting rules	PEP-PCR-ed4-2021 09 06
Date of issue	08-2025	Supplemented by	No PSR
		Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>			
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"			

Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.se.com/contact>
 Head Office
 35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €