


Product End of Life Instructions

Differential thermal overload relay, TeSys K, 3.7-5.5A



End of Life Instructions

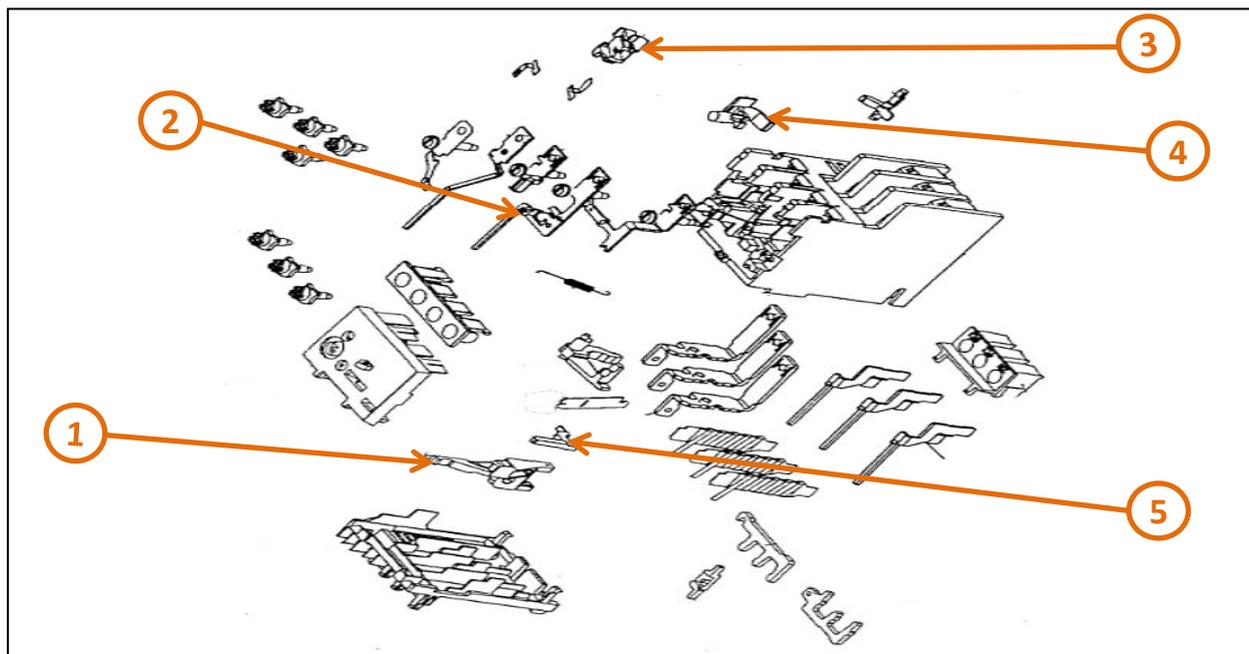

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1,2,3,4	Other plastic parts with brominated flame retardants	2.74	
To be depolluted	5	PC, ABS-PC, PA, PA6, HDPE, SAN with brominated flame retardants	0.18	

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	SCHNEIDER ELECTRIC
Product function	The main purpose of the thermal overload relays is to detect overload currents in order to protect the motor.
Product reference	LR2K0312
Total representative product mass	170 g
Representative product dimensions	58mm x 45mm x 65mm
Accessories	No
Date of information release	01/2023

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
In case of special transportation: transportation method	No

Recyclability potential

47%

Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVEOLI2211018_V1

© 2019 - Schneider Electric – All rights reserved

01/2023