


Wall mounted inlet

Part number: 2167

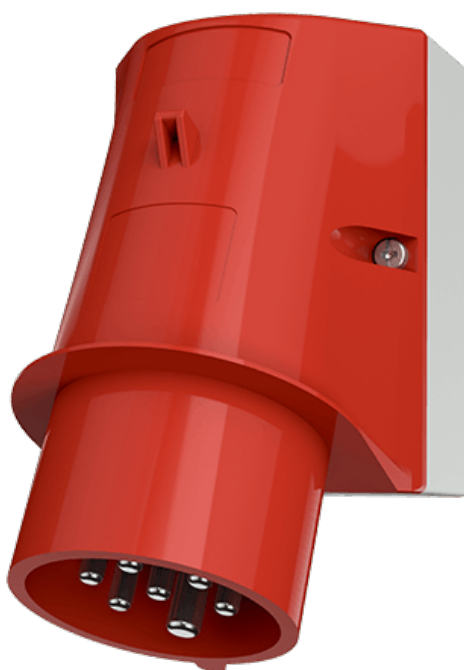

MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- screw connection technology
- highly heat resistant contact carrier, nickel plated contacts
- internal fixing
- 25° inclination
- enclosure base can be turned 180°
- enclosure base with stamped recess for quick cutting out
- cable entry also possible on the back side

Technical Details

Wall mounted inlet	2167
Ampere	32A
Number of poles	7p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP44
Contact carrier	highly heat resistant contact carrier, nickel plated contacts
Connection	screw terminals
Tightening torque connection terminal	PZ2, slot
Tightening torque external screws	PZ2, slot
Phase inverter	without phase inverter
Pilot contact	without pilot contact
Cable entry at the top	1 x M32
Cable entry at the bottom	2 x M25 (blind)
Blind cable entry at the rear	yes
Enclosure base can be turned 180°	yes
Insertion direction	angled
Inclination	25°
Type of mounting	internal fixing
Military version	no
Protection cap	without protection cap
Tightening torque connection terminal for cable cross-section 2,5 - 4,0 mm ²	1.2 Nm

Wall mounted inlet		2167
Tightening torque connection terminal for cable cross-section 6,0 mm ²		1.2 Nm
Recommended wire end treatment for supply cable connection terminal		ferrule square gasproof crimped
Strip length conductor		12 - 17 mm
Conductor cross-section min.		2.5 mm ²
Conductor cross-section max.		4 mm ²
Weight (net)		430 g
Packaging unit		10 pcs
Quantity per pallet		480 pcs
EAN / identification number		4015394013549

Permissible ambient conditions		
	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C
Average temperature over 24 hours		35 °C

Material properties	
Base	PA6 light grey [similar RAL 7035]
Upper part	PA6 red [similar RAL 3013]
External screws	galvanised steel

Material resistance	
The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".	

Material and environmental properties	
RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards

Norm

DIN EN IEC 60309-2


Declaration of Conformity

CE

Test label

EAC, CQC

Dimensional Drawing

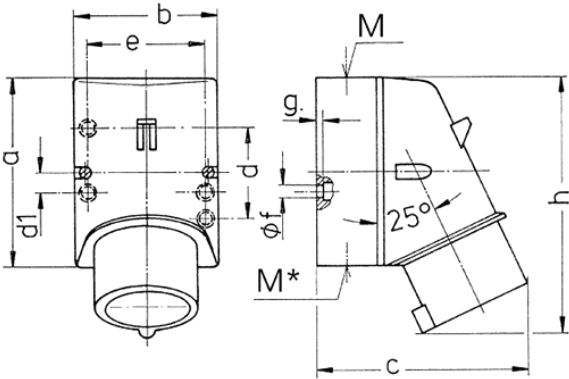

Drawing		16		32	
2 MB 147		7		7	
Dim. in mm					
	Amp.				
	Poles				
a		100		128	
b		75		84	
c		110		135	
d		—		—	
d1		10.5		11	
e		59		68	
f		5		5.3	
g		4		4	
h		135		170	
M		20		32	
M*		20 (blind) to be cut out		2x25 (blind) to be cut out	
Max. cable diam. (mm)		15		18	
Terminal for cond. cross		1		2.5	
section (mm²) min.-max.		—2.5		—4	