


Onefold faceplate, for double switch functions, Niko Toggle alu black brushed

224-57102

4 year
warranty

The Niko Toggle onefold faceplate for a double switch clicks onto a single installed double switch function. The faceplate combines with any available Niko Toggle for double switch functions. It consists of an upper frame and lower frame that are mechanically interconnected. The upperframe is made of anodised aluminium (alu black). The lower frame is made of white coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated. The upper frame is 6 mm thick and the lower frame 2 mm. Niko recommends a design combination with the Niko Toggle in the following colour: alu black.

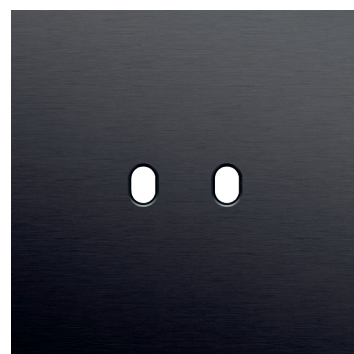

Technical data

Onefold faceplate, for double switch functions, Niko Toggle alu black brushed.

- Simple faceplate for one switch.
- Colour: alu black (approximately NCS S 8005 - R50B, RAL 000 20 00)
- Recommended colour central plate: alu black
- Frame composition: It consists of an upper frame and lower frame that are mechanically interconnected.
- Material upperframe: The upperframe is made of anodised aluminium (alu black).
- Material lower frame: The lower frame is made of white coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Surface-mounting height: max. 8.5 mm
- Fire safety
 - self-extinguishing: complies with a filament test of 650°C
 - halogen-free
- Protection degree: The combination of a mechanism, a central plate and a faceplate has a protection degree of IP20.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 x 83 x 10 mm
- Dimensions visible (HxWxD): 83 x 83 x 8 mm
- Marking: CE

