


**A2T 2.5 VL DL BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

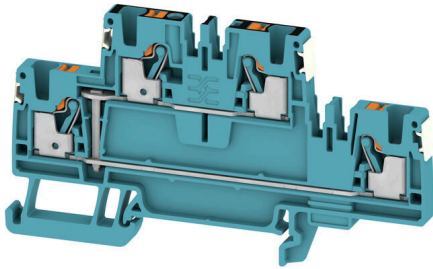

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |   |
|------------|---|
| Version    | Feed-through terminal, Double-tier terminal, PUSH IN, 2.5 mm <sup>2</sup> , 800 V, 24 A, blue |
| Order No.  | <a href="#">2815620000</a>  |
| Type       | A2T 2.5 VL DL BL  |
| GTIN (EAN) | 4064675304098   |
| Qty.       | 50 items  |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

Approvals



ROHS Conform

### Dimensions and weights

|            |         |                 |             |
|------------|---------|-----------------|-------------|
| Depth      | 50.5 mm | Depth (inches)  | 1.9882 inch |
| Height     | 64 mm   | Height (inches) | 2.5197 inch |
| Width      | 5.1 mm  | Width (inches)  | 0.2008 inch |
| Net weight | 14.96 g |                 |             |

### Temperatures

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Ambient temperature              | -60 °C...85 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C         |                                  |        |

### Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

### Material data

|                |       |                           |       |
|----------------|-------|---------------------------|-------|
| Basic material | Wemid | Insulating material       | Wemid |
| Colour         | blue  | UL 94 flammability rating | V-0   |

### System specifications

|                                   |     |                                     |       |
|-----------------------------------|-----|-------------------------------------|-------|
| End cover plate required          | Yes | Number of potentials                | 1     |
| Number of levels                  | 2   | Number of clamping points per level | 2     |
| Levels cross-connected internally | Yes | Mounting rail                       | TS 35 |

### Additional technical data

Explosion-tested version Yes

### Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

### Conductors for clamping (rated connection)

|   |                   |
|---|-------------------|
| Wire connection cross section AWG, max. | AWG 12            |
| Connection direction                    | top               |
| Stripping length                        | 12 mm             |
| Type of connection 2                    | PUSH IN           |
| Type of connection                      | PUSH IN           |
| Number of connections                   | 4                 |
| Clamping range, max.                    | 4 mm <sup>2</sup> |
| Wire connection cross section AWG, min. | AWG 28            |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

### Technical data

|   |  |         |                      |
|---|--|---------|----------------------|
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm <sup>2</sup>                      |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>                      |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Connection cross-section, stranded, max.  | 4 mm <sup>2</sup>                      |         |                      |
| Connection cross-section, stranded, min.  | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.   | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup>                    |         |                      |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | min.    | 6 mm                 |
|   |  | max.    | 8 mm                 |
|   | Cross-section for conductor connection | min.    | 0.14 mm <sup>2</sup> |
|   |  | max.    | 0.34 mm <sup>2</sup> |
|   | Tube length                            | min.    | 6 mm                 |
|   |  | max.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 1 mm <sup>2</sup>    |
|   | Tube length                            | min.    | 8 mm                 |
|   |  | max.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 2.5 mm <sup>2</sup>  |
| Tube length for twin wire-end ferrule   | Tube length                            | min.    | 8 mm                 |
|   |  | max.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 0.75 mm <sup>2</sup> |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Tube length                            | nominal | 5 mm                 |
|   | Cross-section for conductor connection | nominal | 0.25 mm <sup>2</sup> |
|   | Tube length                            | min.    | 6 mm                 |
|   |  | max.    | 10 mm                |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 1 mm <sup>2</sup>    |
|   | Tube length                            | min.    | 7 mm                 |
|   |  | max.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 4 mm <sup>2</sup>    |

### General

|   |               |   |        |
|---|---------------|---|--------|
| Wire connection cross section AWG, max. | AWG 12        | Wire connection cross section AWG, min. | AWG 28 |
| Standards                               | IEC 60947-7-1 | Mounting rail                           | TS 35  |

### Rating data

|                     |                     |                 |       |
|---------------------|---------------------|-----------------|-------|
| Rated cross-section | 2.5 mm <sup>2</sup> | Rated voltage   | 800 V |
| Rated DC voltage    | 800 V               | Nominal current | 24 A  |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

|                                 |      |           |               |
|---------------------------------|------|-----------|---------------|
| Current at maximum wires        | 24 A | Standards | IEC 60947-7-1 |
| Rated impulse withstand voltage | 8 kV |           |               |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 14.0 | 27-25-01-02 |
| ECLASS 15.0 | 27-25-01-02 |             |             |

**Drawings**



## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### Warning cover

Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.




### General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | AAM 2.5 YE FLASH           | Version   |  |
| Order No.  | <a href="#">2635550000</a> | A-series, Terminal marker, 8 x 5.1 mm, Pitch in mm (P): 5.00 yellow |  |
| GTIN (EAN) | 4050118674095              |   |  |
| Qty.       | 40 ST                      |   |  |

### End bracket

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.



### General ordering data

|            |                            |                                 |  |
|------------|----------------------------|---------------------------------|--|
| Type       | AEB 35 SCL/1 V0            | Version                         |  |
| Order No.  | <a href="#">2661280000</a> | A-series, End bracket           |  |
| GTIN (EAN) | 4050118702163              |                                 |  |
| Qty.       | 20 ST                      |                                 |  |
| Type       | AEB 35 SCL/1 V0 BK         | Version                         |  |
| Order No.  | <a href="#">2661300000</a> | A-series, End bracket           |  |
| GTIN (EAN) | 4050118702187              |                                 |  |
| Qty.       | 20 ST                      |                                 |  |
| Type       | AEB 35 SCL/1 V0 GY         | Version                         |  |
| Order No.  | <a href="#">2661290000</a> | A-series, End bracket           |  |
| GTIN (EAN) | 4050118702170              |                                 |  |
| Qty.       | 20 ST                      |                                 |  |
| Type       | ZST 1                      | Version                         |  |
| Order No.  | <a href="#">1269070000</a> | Accessories, Accessories holder |  |
| GTIN (EAN) | 4050118094091              |                                 |  |
| Qty.       | 25 ST                      |                                 |  |
| Type       | ZST                        | Version                         |  |
| Order No.  | <a href="#">1678680000</a> | Z-series, Accessories holder    |  |
| GTIN (EAN) | 4008190466770              |                                 |  |
| Qty.       | 10 ST                      |                                 |  |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

## End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

## General ordering data

|            |                            |                           |
|------------|----------------------------|---------------------------|
| Type       | APP 4                      | Version                   |
| Order No.  | <a href="#">2489110000</a> | A-series, Partition plate |
| GTIN (EAN) | 4050118499322              |                           |
| Qty.       | 50 ST                      |                           |
| Type       | AEP 2T 2.5                 | Version                   |
| Order No.  | <a href="#">1547690000</a> | A-series, End plate       |
| GTIN (EAN) | 4050118441048              |                           |
| Qty.       | 20 ST                      |                           |
| Type       | AEP 2T 2.5 BL              | Version                   |
| Order No.  | <a href="#">1547700000</a> | A-series, End plate       |
| GTIN (EAN) | 4050118441055              |                           |
| Qty.       | 20 ST                      |                           |

## Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ATPG 1.5-10 L              | Version   |
| Order No.  | <a href="#">1991890000</a> | Test adapter (terminal), 1.5 mm <sup>2</sup> , 250 V, 0.2 A |
| GTIN (EAN) | 4050118376647              |   |
| Qty.       | 50 ST                      |   |
| Type       | ATPG 2.5 MI-R              | Version   |
| Order No.  | <a href="#">1991960000</a> | Test adapter (terminal), 1.5 mm <sup>2</sup> , 250 V, 0.2 A |
| GTIN (EAN) | 4050118376685              |   |
| Qty.       | 50 ST                      |   |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

## Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5N/10                | Version   |
| Order No.  | <a href="#">1527690000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118447989              | 10, Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm             |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/10 BL             | Version   |
| Order No.  | <a href="#">1527880000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 10, |
| GTIN (EAN) | 4050118448573              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/10 RD             | Version   |
| Order No.  | <a href="#">2108910000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 10,  |
| GTIN (EAN) | 4050118486018              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/2                 | Version   |
| Order No.  | <a href="#">1527540000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448467              | 2, Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm               |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/2 BL              | Version   |
| Order No.  | <a href="#">1527740000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118448658              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                  |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/2 RD              | Version   |
| Order No.  | <a href="#">2108470000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 2,   |
| GTIN (EAN) | 4050118448542              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                  |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/20                | Version   |
| Order No.  | <a href="#">1527720000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118447972              | 20, Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm              |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/20 BL             | Version   |
| Order No.  | <a href="#">1527890000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 20, |
| GTIN (EAN) | 4050118448566              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/20 RD             | Version   |
| Order No.  | <a href="#">2108920000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 20,  |
| GTIN (EAN) | 4050118485899              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/3                 | Version   |
| Order No.  | <a href="#">1527570000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448450              | 3, Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                |
| Qty.       | 60 ST                      |   |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Accessories

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5N/3 BL              | Version   |
| Order No.  | <a href="#">1527770000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 3,    |
| GTIN (EAN) | 4050118448641              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                     |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/3 RD              | Version   |
| Order No.  | <a href="#">2108690000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 3,     |
| GTIN (EAN) | 4050118448535              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                     |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/4                 | Version   |
| Order No.  | <a href="#">1527590000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118448443              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/4 BL              | Version   |
| Order No.  | <a href="#">1527780000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 4,    |
| GTIN (EAN) | 4050118448634              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/4 RD              | Version   |
| Order No.  | <a href="#">2108700000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 4,     |
| GTIN (EAN) | 4050118448528              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5N/5                 | Version   |
| Order No.  | <a href="#">1527620000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles: 5,  |
| GTIN (EAN) | 4050118448436              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                   |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/5 BL              | Version   |
| Order No.  | <a href="#">1527790000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 5,    |
| GTIN (EAN) | 4050118448627              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                   |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/5 RD              | Version   |
| Order No.  | <a href="#">2108710000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 5,     |
| GTIN (EAN) | 4050118448511              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                   |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/50                | Version   |
| Order No.  | <a href="#">1527730000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles: 50, |
| GTIN (EAN) | 4050118411362              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                    |
| Qty.       | 5 ST                       |   |
| Type       | ZQV 2.5N/50 BL             | Version   |
| Order No.  | <a href="#">1527920000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 50,   |
| GTIN (EAN) | 4050118448559              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                    |
| Qty.       | 5 ST                       |   |
| Type       | ZQV 2.5N/50 RD             | Version   |
| Order No.  | <a href="#">2109000000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 50,    |
| GTIN (EAN) | 4050118486001              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                    |
| Qty.       | 5 ST                       |   |
| Type       | ZQV 2.5N/6                 | Version   |
| Order No.  | <a href="#">1527630000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118448429              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                   |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5N/6 BL              | Version   |
| Order No.  | <a href="#">1527820000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 6,    |
| GTIN (EAN) | 4050118448610              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                   |
| Qty.       | 20 ST                      |   |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Accessories

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZQV 2.5N/6 RD              | Version  |
| Order No.  | <a href="#">2108720000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118448504              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/7                 | Version  |
| Order No.  | <a href="#">1527640000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448412              | 7, Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm             |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/7 BL              | Version  |
| Order No.  | <a href="#">1527830000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 7, |
| GTIN (EAN) | 4050118448603              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/7 RD              | Version  |
| Order No.  | <a href="#">2108810000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118448498              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/8                 | Version  |
| Order No.  | <a href="#">1527670000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448405              | 8, Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm             |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/8 RD              | Version  |
| Order No.  | <a href="#">2108870000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118448481              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/8 BL              | Version  |
| Order No.  | <a href="#">1527840000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 8, |
| GTIN (EAN) | 4050118448597              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/9                 | Version  |
| Order No.  | <a href="#">1527680000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118447996              | 9, Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm             |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/9 BL              | Version  |
| Order No.  | <a href="#">1527870000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 9, |
| GTIN (EAN) | 4050118448580              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                |
| Qty.       | 20 ST                      |  |
| Type       | ZQV 2.5N/9 RD              | Version  |
| Order No.  | <a href="#">2108900000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118448474              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                |
| Qty.       | 20 ST                      |  |

## End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

## Accessories

## General ordering data

|            |                            |                       |  |
|------------|----------------------------|-----------------------|--|
| Type       | AEB 35 SC/1                | Version               |  |
| Order No.  | <a href="#">1991920000</a> | A-series, End bracket |  |
| GTIN (EAN) | 4050118376722              |                       |  |
| Qty.       | 50 ST                      |                       |  |

## SnapMark

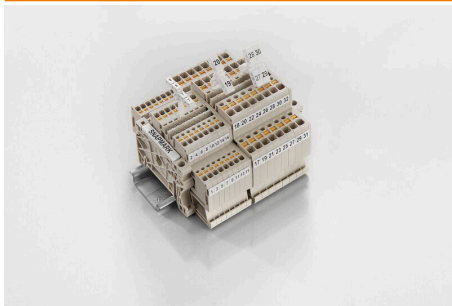

SnapMark - this tag carrier has been developed specifically for the I-series double-level terminal IDK 1.5N. The flexible pivot mechanism allows cross-connections to be easily installed or removed. It can hold four DEK 5 labelling tags or two WS 10/5 Middle connector markers.

## General ordering data

|            |                            |  |  |
|------------|----------------------------|--|--|
| Type       | SNAPMARK I                 | Version  |  |
| Order No.  | <a href="#">1805880000</a> | Group markers, Terminal marker, 23 x 5 mm, Pitch in mm (P): 5.00 |  |
| GTIN (EAN) | 4032248273614              | Weidmueller, white   |  |
| Qty.       | 50 ST                      |  |  |

## Accessories



Accessories for testing and measuring equipment

## General ordering data

|            |                            |            |  |
|------------|----------------------------|------------|--|
| Type       | ZUB MULTIMETER             | Version    |  |
| Order No.  | <a href="#">9205270000</a> | Multimeter |  |
| GTIN (EAN) | 4032248723522              |            |  |
| Qty.       | 1 ST                       |            |  |

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |         |                       |
|------------|----------------------------|---------|-----------------------|
| Type       | AEB 35 SC/1 BK             | Version |                       |
| Order No.  | <a href="#">2475310000</a> | Version | A-series, End bracket |
| GTIN (EAN) | 4050118487114              |         |                       |
| Qty.       | 50 ST                      |         |                       |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |         |                            |
|------------|----------------------------|---------|----------------------------|
| Type       | BZT 1 WS 10/5              | Version |                            |
| Order No.  | <a href="#">1805490000</a> | Version | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |         |                            |
| Qty.       | 100 ST                     |         |                            |
| Type       | BZT 1 ZA WS 10/5           | Version |                            |
| Order No.  | <a href="#">1805520000</a> | Version | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |         |                            |
| Qty.       | 100 ST                     |         |                            |

## Slotted screwdriver



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## A2T 2.5 VL DL BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | SDIS SLIM 0.6X3.5X100      | Version   |  |
| Order No.  | <a href="#">2749610000</a> | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |  |
| GTIN (EAN) | 4050118896350              | thickness (A): 0.6 mm   |  |
| Qty.       | 1 ST                       |   |  |

### Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

### General ordering data

|            |                            |  |  |
|------------|----------------------------|--|--|
| Type       | FZS 2/4 RT/80 SAKT4        | Version  |  |
| Order No.  | <a href="#">1276300000</a> | Plug (terminal), Plug-in connection, 2 mm <sup>2</sup> , Number of connections: 2, |  |
| GTIN (EAN) | 4008190026080              | Number of poles: 1, Width: 9 mm  |  |
| Qty.       | 20 ST                      |  |  |