

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840

Item No: 0029269

SYLVANIA




50,000 hours average rated lifetime Last 2.5 times longer than 49W 1449mm fluorescent tri-phosphor T5 lamp High switching cycles – 200,000X High lumen efficacy Omni-directional light distribution and wide beam angle Minimum and maximum operating temperature: -20°C to 50°C Glass construction and polycarbonate end-caps Not suitable for direct mains (AC 220-240V) or magnetic/ CCG ballast Works only with compatible electronic ballasts Ideal for factories, parking lots, supermarkets, department stores, schools and offices

Technical Assets

Dimensions (mm)

Photometrics

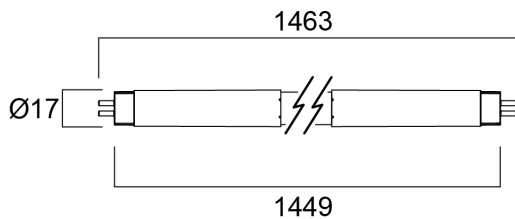

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840

Item No: 0029269

SYLVANIA

General data

| | |
|---|---|
| Product name | ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840 |
| Technology | LED |
| Watt (Rated) (W) | 26 |
| Lamp shape | Tube, double-ended |
| Lamp finish | Opal |
| Fixture rating | Open |
| General application | Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail |
| Operating temperature range (°C) | -20°C...+45°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001959 |
| Warranty | 5 years |

Optical data

| | |
|--|------------|
| Useful luminous flux (Φuse) | 3900 |
| Luminous flux (lm) | 3900 |
| Luminous flux (Rated) (lm) | 3900 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Cool White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 150 |
| Photobiological Risk Group | RG0 |
| Lumen maintenance at end of nominal life (%) | 70 |

Electrical data

| | |
|---|---------|
| Power consumption (W) | 26 |
| Wattage (W) | 26 |
| Primary Supply/Product voltage - min (V) | 110 |
| Primary Supply/Product voltage - max (V) | 110 |
| Ignition voltage (V) | 80 |
| Control gear required | Yes |
| No. Of switching cycles before premature failures | >100000 |
| Dimmable | No |
| Inrush Current (A) | 35.2 |
| Inrush Duration (µs) | 421 |
| Lamp Energy Label (class) | D |
| Max. products per 16A C Breaker | 34 |
| Max. products per 20A C Breaker | 42 |
| Max. products per 10A B Breaker | 35 |
| Max. products per 13A B Breaker | 46 |
| Max. products per 16A B Breaker | 56 |

Lifetime data

| | |
|----------------------------|-------|
| Lifespan L70 B50 | 50000 |
| Average life (Nominal) (h) | 50000 |
| Average life (Rated) (h) | 50000 |

Physical data

| | |
|-------------------------------|------|
| IP rating | IP20 |
| Nominal Product Length (mm) | 1462 |
| Nominal Product Diameter (mm) | 17 |
| Weight (kg) | 0.17 |

ToLEDo Superia T5 ECG HO V3 5FT 3900LM 840

Item No: 0029269



Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 5410288292694 |
| Packaging single length / height (cm) | 146.2 |
| Packaging single width (cm) | 1.8 |
| Packaging single depth (cm) | 1.8 |
| DUN14 (inner) | 15410288292691 |
| Units per outer package | 10 |
| Packaging outer length / height (cm) | 152.1 |
| Packaging outer width (cm) | 15.5 |
| Packaging outer depth (cm) | 7.8 |

Safety data

| | |
|-------------------------------------|----------------|
| Optimal operating condition (°C) | -20-45 |
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Suitable for household illumination | Yes |
| Safety message | None |