

27 802 660 Product version up to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection

Technical data:

- rosette Ø 60 mm
- 1/2" connection

Notes:

Intrinsic protection against back flow.

Recommended miscellaneous

Concealed wall elbow -


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm



27 802 660 Product version up to 6/3/2020

mm [inches]

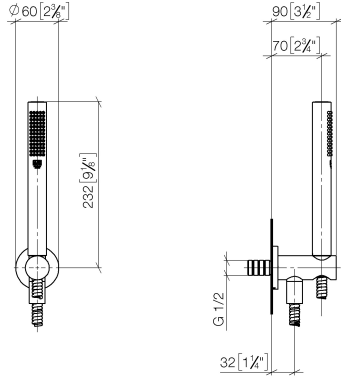

Flow rate chart



Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Hand shower set with integrated shower holder - Matte Black

SERIES SPECIFIC


27 802 660 Product version up to 6/3/2020

Certificates and sustainability

Belgaqua_24-007-2 LGA_29

LGA_29

WRAS_250402

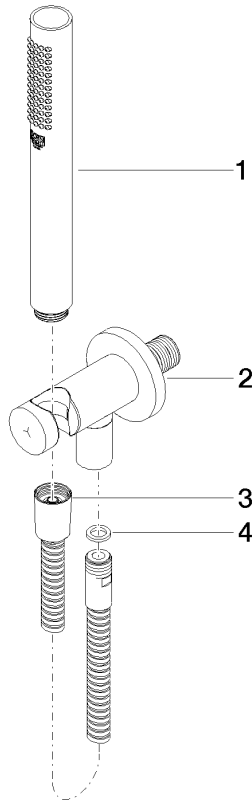

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	28 490 660-33	Wall elbow with integrated shower holder - Matte Black	1.00	20
4	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
3	90 30 02 072 00-33	Metal shower hose 1/2" x 3/8" x 1250 mm - Matte Black	1.00	40
1	28 029 979-33	SERIES-VARIOUS Hand shower - Matte Black	1.00	40