

Concord

BEACON 85CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059665



Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 2013lm, luminaire efficacy: 96lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Product Overview


Product name	BEACON 85CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
E-number FI	4280815
E-number SE	7401242
Fixture luminous flux (lm)	2013
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White

Concord

BEACON 85CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059665

CRI (Ra)	85
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596652
Warranty	5 years

Photometry

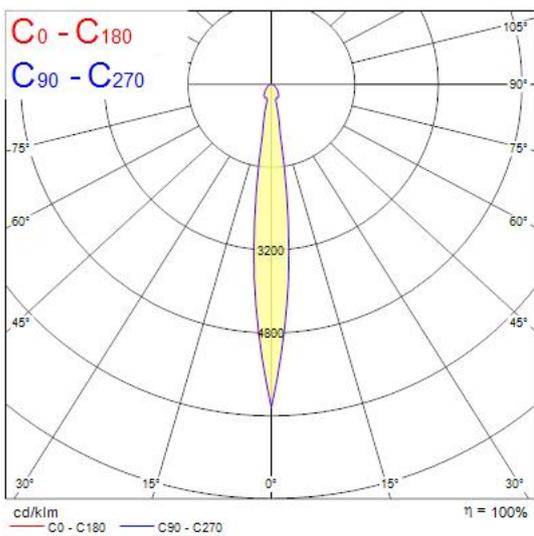

Technical drawings

