


## Walraven starQuick® Clamp (White)

(C0510)

for securing conduits and pipes to walls, floors, or ceilings

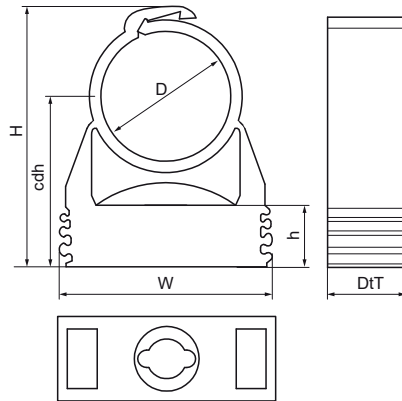

### Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), white (according to RAL 9003)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Outside Pipe Diameter	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter	D	FH	H	W	DtT	cdh	h	G	Fa,z	Fb,z
Unit description	mm	mm	mm	mm	mm	mm	mm		N	N
0855010	10 - 12	8	34	29	17	24	12.1	None	500	500
0855012	12 - 14	8	36	29	17	25	10.6	None	180	550
0855015	14 - 16	8	36	29	17	25	10.6	None	200	600
0855018	16 - 20	8	40	29	17	27	10.6	None	230	700
0855022	20 - 23	8	43	29	17	28	10.6	None	270	800
0855028	24 - 28	8	50	40	18	32	10.6	None	280	850
0855031	28 - 32	8	55	40	17	36	10.6	None	300	900
0855035	32 - 35	8	59	43	17	37	10.6	None	330	1,000
0855038	35 - 40	8	68	47	17	44	10.6	None	330	1,100
0855042	40 - 44	8	70	52	17	44	12.1	None	330	1,200
0855050	44 - 50	8	79	57	17	50	12.1	None	330	1,300
0855054	48 - 55	8	82	63	17	50	12.1	None	330	1,400
0855063	59 - 95	8	95	74	20	57	12.1	None	500	1,500