

ASCENT 150 II 3400 4K DALI WHT

Item No: 2059449


Concord



The ASCENT 150 II 3400 4K DALI WHT is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP44/IK03

Technical Assets


Dimensions (mm)

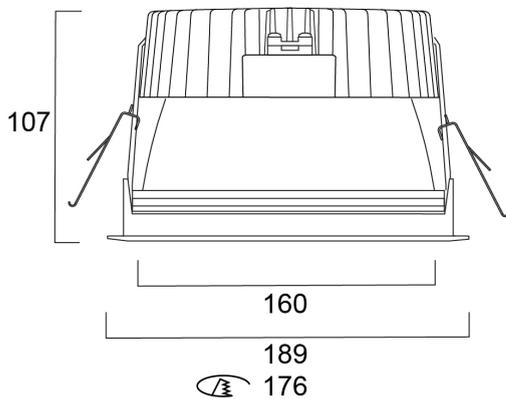

Photometrics

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁₀ [lx]	Illuminance [lx]
0.5	0.82	E ₀ 36.5°	1382	1888
1.0	1.65	E ₀ 36.5°	1030	421
1.5	2.47	E ₀ 36.5°	880	197
2.0	3.30	E ₀ 36.5°	688	97
2.5	4.12	E ₀ 36.5°	591	67
3.0	4.95	E ₀ 36.5°	522	47

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 79.0°)



ASCENT 150 II 3400 4K DALI WHT

Item No: 2059449

Concord

General data

Product name	ASCENT 150 II 3400 4K DALI WHT
Technology	LED
Cap/Base	Q10S
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	3400
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	126
LOR (%)	100
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	80
Distribution type	Diffuse
Glare control	< 27
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq xx.x$ %	7
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	1000
Inrush Current (A)	25
Inrush Duration (μ s)	141
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	40
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	19
Max. products per 13A B Breaker	24
Max. products per 16A B Breaker	31
Max. products per 20A B Breaker	40
Connectable conductor cross section - Min (mm ²)	1
Connectable conductor cross section - Max (mm ²)	1

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55000

ASCENT 150 II 3400 4K DALI WHT

Item No: 2059449

Concord

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Length (mm)	188
Nominal Product Width (mm)	188
Nominal Product Height (mm)	107
Weight (kg)	1.03
Recessed Depth (mm)	120

Packaging

Product EAN number	5025768594498
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (inner)	05025768594498
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	25-25